

INSTRUCTION MANUAL
MODEL 802
50 MHz PULSE
GENERATOR

WAVETEK
SAN DIEGO

9045 BALBOA AVENUE, SAN DIEGO, CALIFORNIA

INSTRUCTION MANUAL
MODEL 802
50 MHz PULSE
GENERATOR

THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO WAVETEK. THE INFORMATION IN THIS DOCUMENT IS NOT TO BE USED OR DUPLICATED IN ANY MANNER WITHOUT THE PRIOR APPROVAL IN WRITING OF WAVETEK.

WAVETEK®
SAN DIEGO

9045 Balboa Ave., San Diego, Calif. 92123
P. O. Box 651, San Diego, California 92112
Tel 714/279-2200 TWX 910-335-2007

REV A - 9/78

WARRANTY

All Wavetek instruments are warranted against defects in material and workmanship for a period of one year after date of manufacture. Wavetek agrees to repair or replace any assembly or component (except batteries) found to be defective, under normal use, during this period. Wavetek's obligation under this warranty is limited solely to repairing any such instrument which in Wavetek's sole opinion proves to be defective within the scope of the warranty when returned to the factory or to an authorized service center. Transportation to the factory or service center is to be prepaid by purchaser. Shipment should not be made without prior authorization by Wavetek.

This warranty does not apply to any products repaired or altered by persons not authorized by Wavetek, or not in accordance with instructions furnished by Wavetek. If the instrument is defective as a result of misuse, improper repair, or abnormal conditions or operations, repairs will be billed at cost.

Wavetek assumes no responsibility for its product being used in a hazardous or dangerous manner either alone or in conjunction with other equipment. High voltage used in some instruments may be dangerous if misused. Special disclaimers apply to these instruments. Wavetek assumes no liability for secondary charges or consequential damages and, in any event, Wavetek's liability for breach of warranty under any contract or otherwise, shall not exceed the purchase price of the specific instrument shipped and against which a claim is made.

Any recommendations made by Wavetek for use of its products are based upon tests believed to be reliable, but Wavetek makes no warranty of the results to be obtained. This warranty is in lieu of all other warranties, expressed or implied, and no representative or person is authorized to represent or assume for Wavetek any liability in connection with the sale of our products other than set forth herein.

CONTENTS

SECTION 1	GENERAL DESCRIPTION	
1.1	THE MODEL 802	1-1
1.2	SPECIFICATIONS	1-1
1.2.1	Versatility	1-1
1.2.2	Pulse Outputs	1-1
1.2.3	Time Domain	1-2
1.2.4	Input Characteristics	1-2
1.2.5	General	1-2
SECTION 2	INSTALLATION	
2.1	MECHANICAL INSTALLATION	2-1
2.2	ELECTRICAL INSTALLATION	2-1
2.2.1	Power Connection	2-1
2.2.2	Signal Connections	2-1
2.3	ELECTRICAL ACCEPTANCE CHECK	2-1
SECTION 3	OPERATION	
3.1	CONTROLS AND CONNECTORS	3-1
3.2	NOTES ON OPERATION	3-2
3.2.1	Modes	3-2
3.2.2	White Marks	3-2
3.2.3	Pulse Width and Delay	3-2
3.2.4	Output Terminations	3-4
3.2.5	Duty Cycle	3-5
3.2.6	Output Mixing	3-5
3.2.7	Precise Output Levels	3-5
3.2.8	Fixed Delay	3-5
3.2.9	Two Phase Clocking	3-5
3.2.10	Rise Time Measurements	3-6
3.3	OPERATION	3-6
3.3.1	Continuous Pulses	3-6
3.3.2	Wide Duty Cycle Pulses	3-6
3.3.3	Externally Triggered Pulses	3-6
3.3.4	Manually Triggered Pulses	3-6
3.3.5	Gated Pulses	3-7
3.3.6	Pulses With Width Controlled Externally	3-7
3.3.7	Double Pulses	3-7

Contents (Continued)

SECTION 4	CIRCUIT DESCRIPTION	
4.1	OVERALL BLOCK DIAGRAM	4-1
4.2	PERIOD OSCILLATOR	4-1
4.3	TRIGGER/GATE CIRCUIT	4-1
4.4	SYNC CIRCUIT	4-1
4.5	DELAY CIRCUIT	4-1
4.6	WIDTH CIRCUIT	4-2
4.7	TTL BUFFER AMPLIFIER	4-2
4.8	OUTPUT AMPLIFIER	4-2
4.9	POWER SUPPLY	4-2
4.10	MODES OF OPERATION	4-2
SECTION 5	CALIBRATION	
5.1	FACTORY REPAIR	5-1
5.2	REQUIRED TEST EQUIPMENT	5-1
5.3	REMOVING GENERATOR COVERS	5-1
5.4	CALIBRATION	5-1
SECTION 6	TROUBLESHOOTING	6-1
6.1	INTRODUCTION	6-1
6.2	SAFETY	6-1
6.2.1	Precautions	6-1
6.2.2	Safety Check	6-1
6.3	CIRCUIT BOARD ACCESS	6-1
6.4	BASIC TECHNIQUES	6-1
6.5	TROUBLESHOOTING INDIVIDUAL COMPONENTS	6-2
6.5.1	Transistor	6-2
6.5.2	Diode	6-2
6.5.3	Operational Amplifier	6-2
6.5.4	FET Transistor	6-2
6.5.5	MOSFET Transistor	6-2
6.5.6	Capacitor	6-2
6.5.7	ECL Gate	6-2
6.6	FLOW CHARTS	6-2
SECTION 7	PARTS AND SCHEMATICS	
7.1	DRAWINGS	7-1
7.2	ORDERING PARTS	7-1
7.3	ADDENDA	7-1

SAFETY

This instrument is wired for earth grounding via the facility power wiring. Do not bypass earth grounding with two wire extension cords, plug adapters, etc.

BEFORE PLUGGING IN the instrument, comply with installation instructions.

MAINTENANCE may require power on with the instrument covers removed. This should be done only by qualified personnel aware of the electrical hazards.

WARNING notes call attention to possible injury or death hazards in subsequent operations.

CAUTION notes call attention to possible equipment damage in subsequent operations.

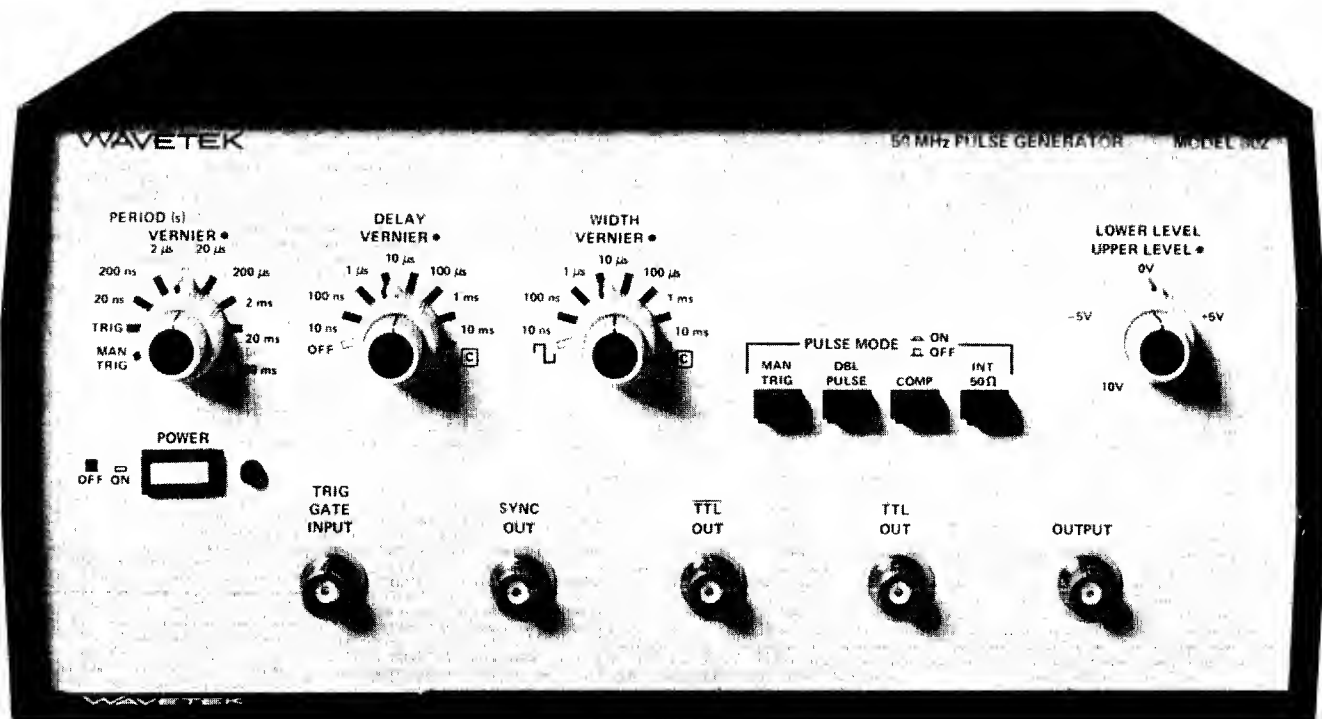


Figure i. Model 802 50 MHz Pulse Generator

1

SECTION 1

GENERAL DESCRIPTION

1.1 THE MODEL 802

The Model 802 is a 50 MHz general purpose laboratory pulse generator. The instrument gives you full control in primary pulse triggering and shaping plus simultaneous TTL, $\overline{\text{TTL}}$ and sync pulses. The primary pulse output has controllability in rate, width, delay, upper level, lower level and a choice of positive, negative or complementary outputs. The TTL and $\overline{\text{TTL}}$ are of fixed levels and rise times that are standard for use with compatible devices. The primary pulse has rise and fall times of 5 ns or less.

The output is ± 10 volts with a 50Ω termination. Upper and lower pulse levels are fully adjustable through ± 10 volts, a 20 volt window. Termination may be internal, at the load or both.

Single pulses or pulse pairs may be triggered; pulse width may be trigger controlled; continuous pulses may be gated for a 'burst' output.

1.2 SPECIFICATIONS

1.2.1 Versatility

Four Simultaneous Pulse Outputs

Fixed TTL level sync, TTL and $\overline{\text{TTL}}$ outputs, and variable amplitude output pulses are available over a 5 Hz (200 ms) to 50 MHz (20 ns) frequency range.

For optimum pulse characteristics from the variable amplitude pulse output, an internal 50Ω load can be selected via a front panel control.

Operational Modes


Continuous: Generator oscillates continuously at selected frequency.

Triggered: Generator quiescent until triggered by external TTL pulse or front panel control, then generates one pulse.

Gated: Generator oscillates at the period rate selected by the front panel control when gate input is high. Generator quiescent when input is low. First cycle is synchronous with rising edge of gating signal.

Double Pulse: Same as continuous, triggered and gated, except two pulses for each period. Time to second pulse is controlled by delay control. Double pulse at all outputs except sync.

External Width: External signal at trigger input determines output pulse width and period as shown.

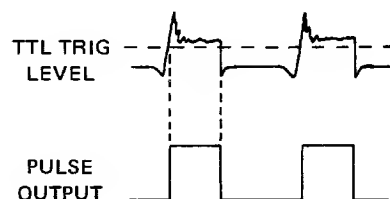

1.2.2 Pulse Outputs


Variable Amplitude Pulse

SOURCE	LOAD	DYNAMIC RANGE	AMPLITUDE	
			MAXIMUM	MINIMUM
50 Ω	50 Ω	+5V -5V	5V	.5V
1 k Ω	50 Ω	+10V	10V	1V
OR 50 Ω	≥ 1 k Ω	-10V		

Upper and lower pulse levels are independently adjustable. Pulse dynamic range is ± 10 V when load is 50Ω terminated and source is not (internal 50Ω off) or vice versa. Maximum pulse amplitude is 10V; minimum is 1V. Dynamic range and pulse amplitude are decreased by a factor of 2 when source and load are 50Ω terminated. Overshoot and ringing are less than $\pm(5\%$ of amplitude setting +100 mV) when terminated into 50Ω at both load and source. Transition times are less than 5 ns.

Sync, TTL and $\overline{\text{TTL}}$ Pulses

Sync pulse levels from 50Ω ; TTL and $\overline{\text{TTL}}$ pulse levels into 50Ω termination.

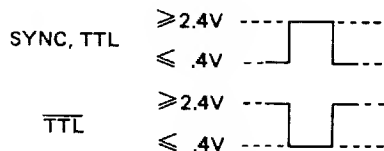

Transition times less than 7 ns into 50 Ω termination.

Normal/Complement Control

Normal pulse or its complement is selected. The normally quiescent and active levels are reversed in complement format. This control affects all outputs except sync pulse.

1.2.3 Time Domain

Period

Period range is from less than 20 ns to greater than 200 ms in 7 overlapping ranges. Period jitter is less than $\pm 0.1\%$ plus 50 picoseconds.


Width

Width range is from less than 10 ns to 10 ms in 6 overlapping ranges. Maximum duty cycle is 70% for periods to 200 ns, decreasing to 50% for 20 ns periods. Width selector switch also has a square wave detent and a customer-specified detent.* \square duty cycle is $50 \pm 4\%$ to 2 μs period, changing to $50 \pm 15\%$ at 20 ns period. Width jitter is less than $\pm 0.1\%$ plus 50 picoseconds. Sync pulse duty cycle is $50 \pm 4\%$ of pulse period to 2 μs period, changing to $50 \pm 15\%$ at 20 ns period except in trigger and external width modes, in which case it is determined by the trigger signal.

Delay

Pulse occurrence can be delayed from less than 10 ns to 10 ms with respect to the sync pulse (not including fixed delay). Delay selector switch also has a customer-specified detent.* Maximum delay duty cycle is 70% for periods to 200 ns, decreasing to 30% for 20 ns periods.

Delay jitter is less than $\pm 0.1\%$ plus 50 picoseconds. Fixed delay is as shown.

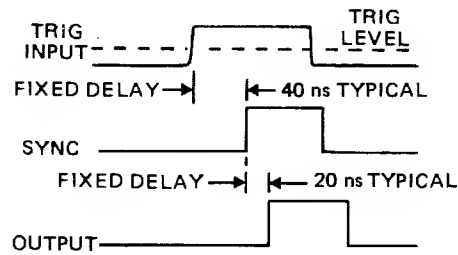

1.2.4 Input Characteristics

External Trigger

The circuit receiving the external trigger is TTL compatible. Triggering level is fixed at approximately 1.4V. Input impedance is greater than 500 Ω shunted by approximately 33 pF. Triggering and gating occurs on the rising edge of the input signal.

1.2.5 General

Environmental

Specifications apply at 25°C $\pm 5^\circ C$ after 30 minutes warm-up. Instrument will operate from 0°C to 50°C.

Dimensions

28.8 cm (11.4 in.) wide; 10.2 cm (4 in.) high; 29 cm (11.4 in.) deep.

Weight

4.0 kg (8.9 lb) net; 5.4 kg (12 lb) shipping.

Power

108 to 132V or 216 to 250V; 50 to 400 Hz; 40 watts nominal.

*Customer-installed capacitor determines detent range.

SECTION 2

INSTALLATION

2.1 MECHANICAL INSTALLATION

After unpacking the instrument, visually inspect all external parts for possible damage to connectors, surface areas, etc. If damage is discovered, file a claim with the carrier who transported the unit. The shipping container and packing material should be saved in case reshipment is required.

2.2 ELECTRICAL INSTALLATION

2.2.1 Power Connection

WARNING

To preclude injury or death due to shock, the third wire earth ground must be continuous to the facility power outlet. Before connecting to the facility power outlet, examine extension cords, autotransformers, etc., between the instrument and the facility power outlet for a continuous earth ground path. The earth ground path can be identified at the plug on the instrument power cord; of the three terminals, the earth ground terminal is the nonmatching shape, usually cylindrical.

CAUTION

To prevent damage to the instrument, check for proper match of line and instrument voltage and proper fuse type and rating.

NOTE

Unless otherwise specified at the time of purchase, this instrument was shipped from the factory with the power transformer connected for operation on a 108 to 126 Vac line supply and with a 0.5 amp fuse.

Conversion to other input voltages requires a change in rear panel fuse-holder voltage card position and fuse according to the following table and procedure.

Card Position	Input Vac	Fuse (Slow Blow, 3 AG)
100	90 to 105	0.5 amp
120	108 to 126	0.5 amp
220	198 to 231	0.25 amp
240	216 to 250	0.25 amp

1. Open fuse holder cover door and rotate FUSE PULL to left to remove the fuse.
2. Select operating voltage by orienting the printed circuit board to position the desired voltage on the top left side. Push the board firmly into its module slot.
3. Rotate the FUSE PULL back into the normal position and insert the correct fuse into the fuse holder. Close the cover door.
4. Connect the ac line cord to the mating connector at the rear of the unit and the power source.

2.2.2 Signal Connections

Use 3 foot RG58U 50 Ω shielded cables equipped with female BNC connectors to distribute input and output signals when connecting this instrument to associated equipment.

2.3 ELECTRICAL ACCEPTANCE CHECK

This checkout procedure verifies the generator operation. If a malfunction is found, refer to the Warranty in the front of this manual. A 2 channel oscilloscope and 50 Ω coax cable are needed for this procedure (see figure 2-1).



Figure 2-1. Initial Setup

Preset the pulse generator controls by setting the following switches to their white mark:

PERIOD/RATE
DELAY
WIDTH

Set the PULSE MODE switches OFF except set INT 50 Ω ON.

Set the following controls to 12 o'clock:

PERIOD/RATE VERNIER
 DELAY VERNIER
 WIDTH VERNIER
 LOWER LEVEL
 UPPER LEVEL

Perform the steps in table 2-1. Only approximate values are required to verify operation.

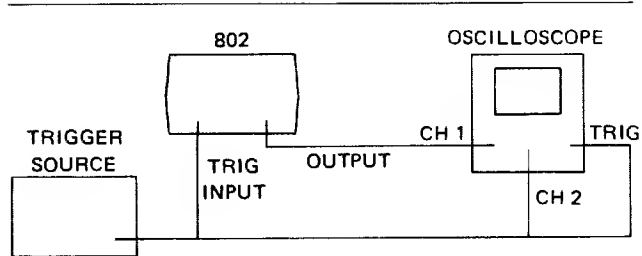



Figure 2-2. Second Setup

Table 2-1. Performance Checkout

Step	Control	Position/Operation	Observation
1	POWER	ON	CH 1: A near 0 volt dc level. (LEVEL control is not calibrated.) CH 2: Approximately 2.5 volt pulses.
2	LOWER LEVEL	Rotate ccw	Pulse base drops 10V.
3	UPPER LEVEL	Rotate ccw	Pulse upper level drops 10V.
4	UPPER LEVEL	Rotate cw. Make observation; then reposition for good display	Pulse rises 10V, then rises 10V more while pulling the base up 10V. Base rises to 0V.
5	COMP	ON then OFF	Set scope for one or two cycles. Observe the switching of duty time from first half cycle to second half cycle.
6	WIDTH	Rotate ccw, then to 10 μ s 100 μ s	Pulse width changes. (Use scope X 10 magnification to see narrow widths.)
7	WIDTH VERNIER	Rotate ccw, then to 12 o'clock	Pulse width decreases, then increases.
8	DELAY	Rotate cw to 10 μ s 100 μ s	Pulse delay changes within cycle time.
9	DELAY VERNIER	Rotate ccw, then cw	Pulse delay moves to left, then right.
10	PERIOD/RATE VERNIER	Rotate cw, then to 12 o'clock	Period increases, then decreases.
11	DBL PULSE	ON	Two pulses instead of one.
12	DELAY VERNIER	Rotate ccw, then cw, but maintain double pulse	Pulse pairs move closer, then further apart.
13	WIDTH VERNIER	Rotate ccw, then to 12 o'clock, but maintain double pulse	Pulse width of each pulse of pulse pair decreases, then increases.
14	OUTPUT	Remove cable; place on TTL connector	TTL double pulse output.
15	TTL OUT	Remove cable; place on $\overline{\text{TTL}}$ connector	$\overline{\text{TTL}}$ double pulse output complement of previous output.

Table 2-1. Performance Checkout (Continued)

Step	Control	Position/Operation	Observation
16		Change to setup in figure 2-2; trigger with a 10 kHz signal; adjust scope for best display	One pulse on CH 2; set of pulses on CH 1.
17	WIDTH	Rotate to 	One pulse on CH 1; one pulse on CH 2.
18	MAN TRIG	ON	Repeated operation makes pulse pair observable.

3

SECTION 3

OPERATION

3.1 CONTROLS AND CONNECTORS

The generator controls and connections are shown in figure 3-1 and keyed to the following descriptions.

- ① **PERIOD/RATE Switch** — Selects one of seven ranges of pulse period calibrated in seconds and hertz. The TRIG detent holds the output at the inactive level until a TTL level trigger signal is applied at the TRIG GATE INPUT BNC. On the input rising edge, one pulse, or one double pulse, is output. The MAN TRIG detent is as the TRIG detent, except pressing the MAN TRIG switch generates the output.

NOTE

For continuous mode operation, low input or 50Ω termination to the TRIG GATE INPUT BNC must be removed.

- ② **DELAY Switch** — Selects one of seven ranges of pulse delay or time-to-second-pulse of double pulses, depending on DBL PULSE switch setting. OFF position of DELAY switch ensures minimum delay. The detent marked "C" is for customer selected range.

VERNIER Control — Varies the delay time within the range selected by the outer knob. Clockwise increases the delay.

- ③ **WIDTH Switch** — Selects one of seven ranges of pulse width or an approximate 50% duty cycle. The detent marked "C" is for customer selected range.

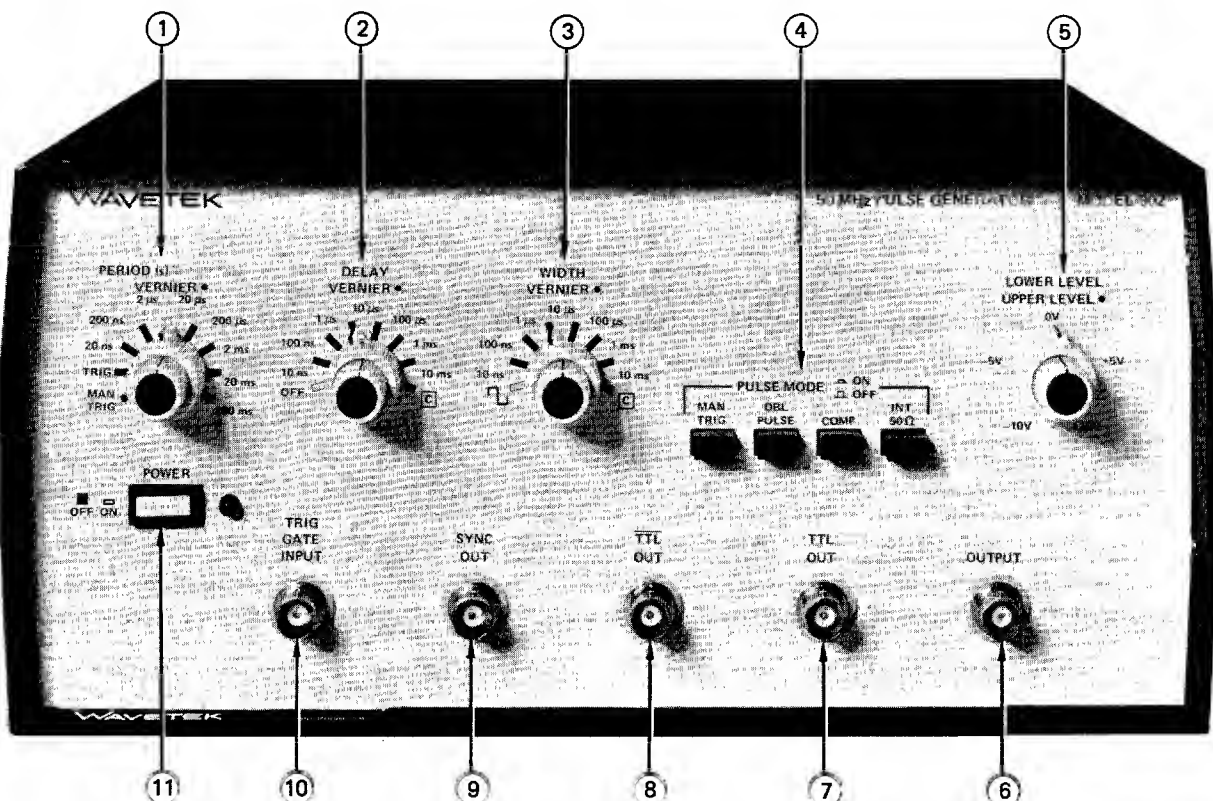



Figure 3-1. Controls and Connections

VERNIER Control — Varies the pulse width within the range selected by the outer knob except in .

- ④ **MAN TRIG Switch** — Triggers the generator one time when pressed. Output depends on the mode selected.

DBL PULSE Switch — When ON, a double pulse occurs in each period. Time to leading edge of second pulse is controlled by the DELAY setting. When OFF, one pulse occurs in each period.

COMP Switch — Selects a normal pulse when OFF or its complement when ON, which swaps the active and quiescent levels. Affects all outputs, except SYNC.

INT 50Ω Switch — When ON, the output current source is 50Ω terminated internally. When OFF, the current source has greater than 1 kΩ impedance.

- ⑤ **LOWER LEVEL Control** — Outer knob sets the lower level of the OUTPUT pulse, which may be varied from -10 to +10 volts into a single 50Ω termination or -5 to +5 volts into a double 50Ω termination. Maximum pulse heights are 10 and 5 volts, respectively.

UPPER LEVEL Control — Inner knob sets the upper level of the OUTPUT pulse. Upper level range is identical to that stated for the lower level.

- ⑥ **OUTPUT Connector** — The main output of the generator. Pulses from this output may be controlled in level as well as frequency and width.

- ⑦ **TTL OUT Connector** — An output with a transistor-transistor-logic level pulse whose occurrence and duration are controllable. Normal pulse level is <0.4V quiescent, > 2.4V active into a 50Ω termination. Levels are reversed for the complement pulse.

- ⑧ **TTL OUT Connector** — An output like the TTL output ⑦ except active and quiescent levels are reversed.

- ⑨ **SYNC OUT Connector** — A TTL level output from a 50Ω source. Square wave in all modes except external width and external trigger modes, in which pulse width is determined by trigger pulse width.

- ⑩ **TRIG GATE INPUT Connector** — Accepts an external TTL level signal to trigger or gate the generator. Triggers on rising edge of input. Gates off when level is at a TTL low level.

- ⑪ **POWER Switch** — Pulse generator on/off switch features red power-on indicator light and black/white changing switch surface for off/on indication.

3.2 NOTES ON OPERATION

3.2.1 Modes


The following modes of operation are available and selectable as described herein.

Continuous — For a continuous stream of pulses, the PERIOD switch must be in any position except TRIG or MAN TRIG and the TRIG GATE INPUT BNC must be free of input signals and 50Ω terminations.

Triggered — For a pulse, or pulse pair, triggered by an external signal, the PERIOD switch must be set to TRIG and a TTL level square pulse must be present at the TRIG GATE INPUT. Triggering occurs on the trigger pulse rising edge.

Manually Triggered — For a pulse, or pulse pair, triggered by the MAN TRIG switch, the PERIOD switch must be set to MAN TRIG.

Gated — For continuous pulses for the duration of a gate signal, the PERIOD switch must be in any position except TRIG or MAN TRIG and a TTL level square pulse must be input to the TRIG GATE INPUT BNC. For manual gating, place a 50Ω termination on the TRIG GATE INPUT BNC to disable the generator output. Push the MAN TRIG switch to gate an output.


External Width — For pulses whose widths are determined by an external signal, the PERIOD switch must be set to TRIG and the WIDTH switch must be set to .

3.2.2 White Marks

When first becoming familiar with the 802, the white mark settings are handy. The white mark settings for the front panel switches will always give a 50 to 500 kHz sync signal when power is on. The same settings will give 50% duty cycle TTL, $\overline{\text{TTL}}$ and output pulses; the LOWER LEVEL/UPPER LEVEL control may need adjusting to observe the output on an oscilloscope. Once the output is observed, each control can be adjusted and observed until the desired result is obtained.

3.2.3 Pulse Width and Delay

Narrow duty cycle pulses require a normal output (COMP OFF) while greater than 70% duty cycle pulses require the COMP ON setting to allow the width circuitry sufficient recovery time. When using DELAY time, ensure that delay $\leq 70\%$ of PERIOD and width $\leq 70\%$ of PERIOD.

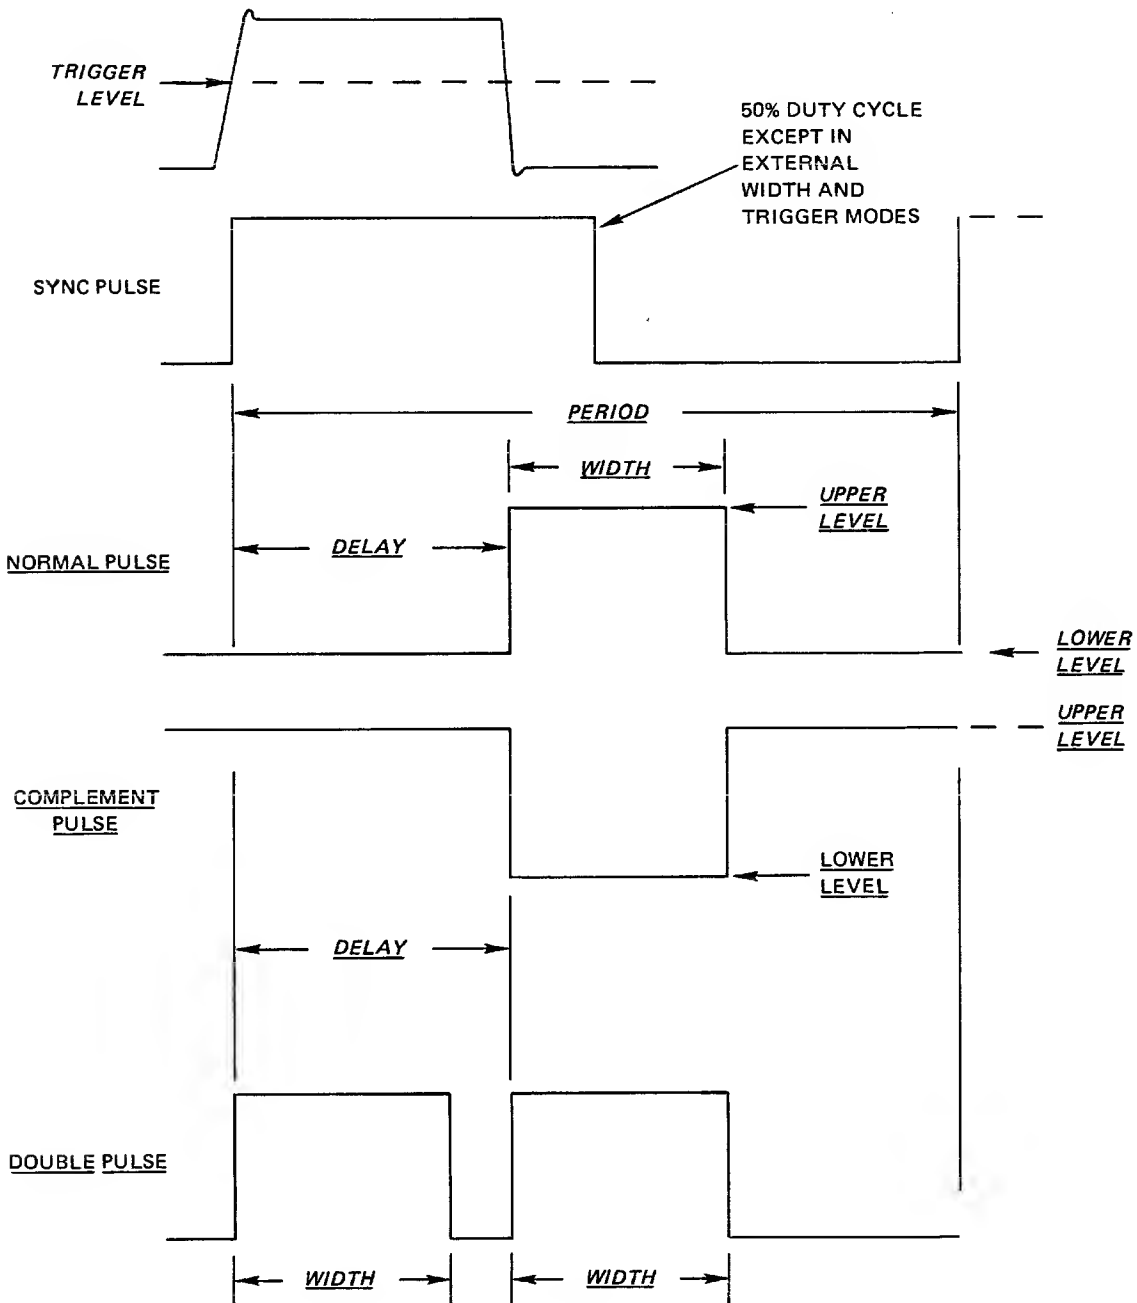

NOTE: Underline indicates a front panel controlled parameter.

Figure 3-2. Pulse Parameters

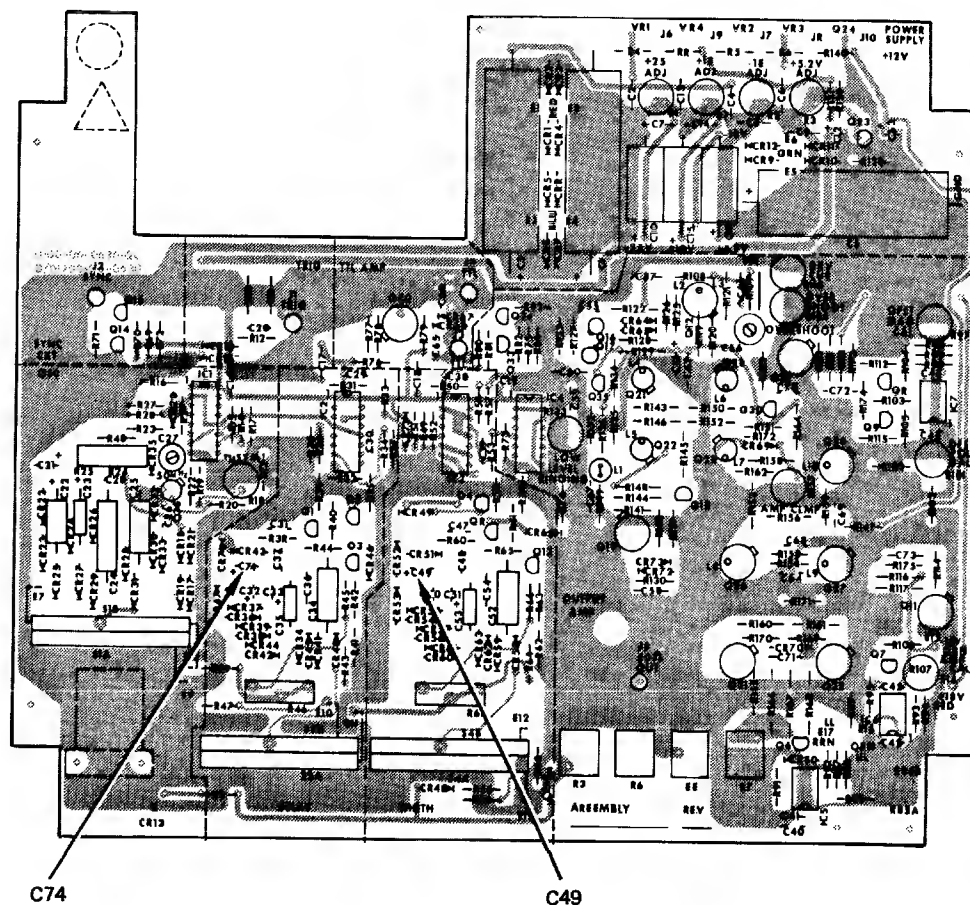


Figure 3-3. Placement of Customer Option Capacitors

The \square width setting gives a 50% duty cycle in continuous mode, when TRIG or MAN TRIG is selected on the PERIOD switch, the pulse width is determined by the trigger signal width. This is external width mode of operation.

Table 3-1. Capacitance and Range

Delay or Width Range	Capacitance
10 ns - 100 ns	None
100 ns - 1 μ s	2000 pF
1 μ s - 10 μ s	0.02 μ F
10 μ s - 100 μ s	0.2 μ F
0.1 ms - 1 ms	2.0 μ F
1 ms - 10 ms	20 μ F
10 ms - 100 ms	200 μ F
0.1 s - 1 s	2000 μ F

The unmarked detent on the DELAY switch and WIDTH switch can be any desired range by placing appropriate capacitors on the circuit board, as shown in figure 3-3. Refer to table 3-1 for typical capacitance and range.

3.2.4 Output Terminations

Only 50 Ω RG58U cables should be used to connect the 802 to the circuit under test. Either the INT 50 Ω should be ON or a 50 Ω 2W load should be used at the circuit end of the cable. For best pulse fidelity, a 50 Ω load at both the source and the load is required.

As shown in figure 3-4, the combinations of load and source impedances determine the output pulse amplitude range

SOURCE	LOAD	DYNAMIC RANGE	AMPLITUDE	
			MAXIMUM	MINIMUM
50Ω	50Ω	+5V -5V	5V	.5V
* 1 kΩ OR 50Ω ≥ 1 kΩ	50Ω	+10V -10V	10V	1V

*1 kΩ is the unterminated source impedance of the OUTPUT.

Figure 3-4. Load and Source Terminations

and the dynamic range. As shown, when a greater than 5V pulse is desired, only one 50Ω termination can be used, and the placement of the termination can optimize the pulse purity. In this case, the capacitance of the circuit being driven must be considered. For capacitive loads greater than 20 pF, reflections on the line are most effectively absorbed by the 50Ω termination at the 802 (INT 50Ω switch ON). For capacitive loads less than 20 pF, the 50Ω termination should be placed at the load side of the line. When a less than 5V pulse is required, a 50Ω termination at each end of the line is recommended for optimum pulse purity.

The 50Ω terminations should always be used on the SYNC, TTL and $\overline{\text{TTL}}$ outputs.

3.2.5 Duty Cycle

Always use the lowest range possible for both delay and width functions. This will reduce the recovery time of the circuit one-shots and extend the maximum duty cycle of the 802 to its fullest capability.

3.2.6 Output Mixing

By triggering a second 802 from the sync output of the first 802 and then mixing their outputs in a common load, three level signals can be created, as shown in figure 3-5.

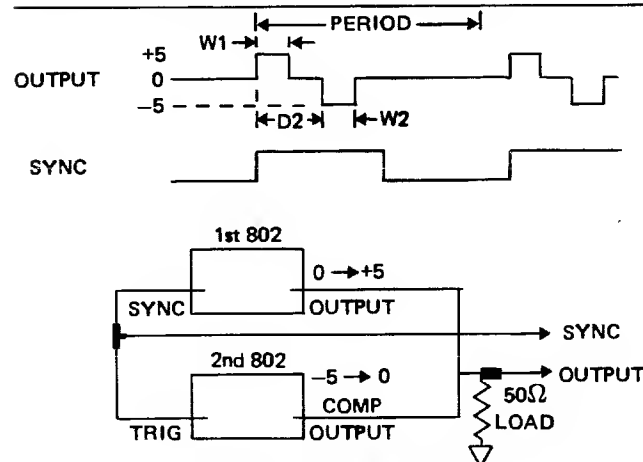


Figure 3-5. Output Mixing

3.2.7 Precise Output Levels

Many times when testing a circuit, it is desirable to lock the output of the generator at either the high or low level. A precise measurement of this level may then be obtained using a DVM.

To lock the output at high or low level, select EXT TRIG and \square with no TRIG GATE INPUT. Use the COMP ON/OFF switch to select high and low level outputs.

3.2.8 Fixed Delay

A fixed delay of 20 ns has been incorporated within the 802 to ensure that the leading edge is visible on the scope. If this delay is not desired, simply increase the length of the sync cable coax at the rate of 1.5 ns/ft to obtain the desired result.

3.2.9 Two Phase Clocking

If a secondary 802 is triggered by the sync out from the primary 802, a two phase nonoverlapped clock source can be obtained as shown in figure 3-6.

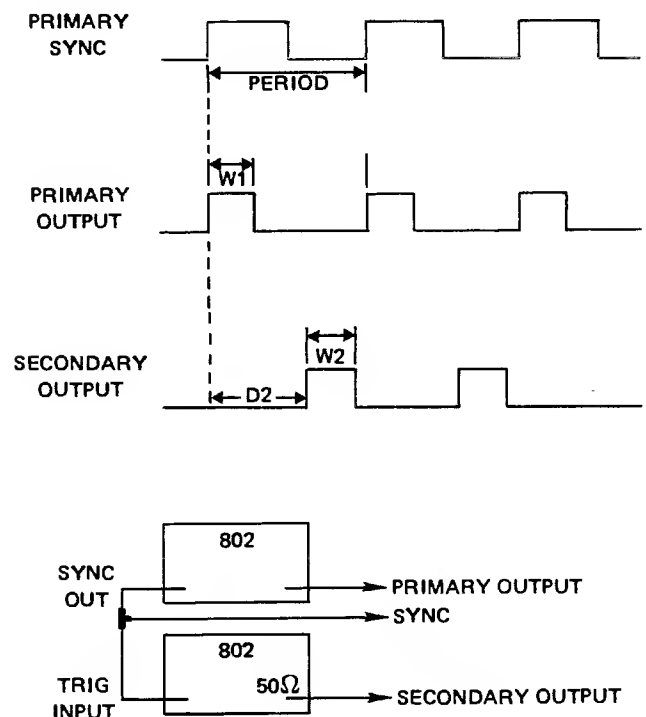


Figure 3-6. Two Phase Clock Generation

3.2.10 Rise Time Measurements

When measuring rise time in a linear device under test, the error induced by the rise time of the testing system must be considered. For example, when observing the 802 rise time on an oscilloscope, 802 rise time is

$$t_{\text{observed}}^2 = t_{\text{scope}}^2 + t_{802}^2$$

or

$$t_{802} = \sqrt{t_{\text{observed}}^2 - t_{\text{scope}}^2}$$

That is, the observed rise time must be corrected for by the inherent oscilloscope rise time to determine the actual 802 rise time. Extending the method to include a circuit under test will determine circuit under test rise time:

$$t_{\text{observed}}^2 = t_{802}^2 + t_{\text{scope}}^2 + t_{\text{c.u.t.}}^2$$

or

$$t_{\text{c.u.t.}} = \sqrt{t_{\text{observed}}^2 - t_{802}^2 - t_{\text{scope}}^2}$$

3.3 OPERATION

In the following descriptions of operation, observe the pulse on an oscilloscope. In continuous mode, trigger oscilloscope on SYNC OUT. In all other modes, trigger on the trigger signal. (See figure 3-2 for pulse parameters.)

Observe the following constraints:

- Delay ≤ 70% of period.
- Width ≤ 70% of period.

3.3.1 Continuous Pulses

Set the controls (and connectors) as follows:

Control	Operation
TRIG GATE INPUT Connector	No signal present
INT 50Ω Switch	ON
PERIOD Switch	Desired range setting
Other Controls	Set as desired

3.3.2 Wide Duty Cycle Pulses

For wider pulses than those that can be normally obtained, set up for a pulse with the complemented width, then press the COMP pulse switch ON. For example, if a 95 ns pulse with a 125 ns repetition rate is desired:

$$125 \text{ ns} - 95 \text{ ns} = 30 \text{ ns}$$

Set up for a 30 ns pulse, then press the COMP switch ON. (See figure 3-7.)

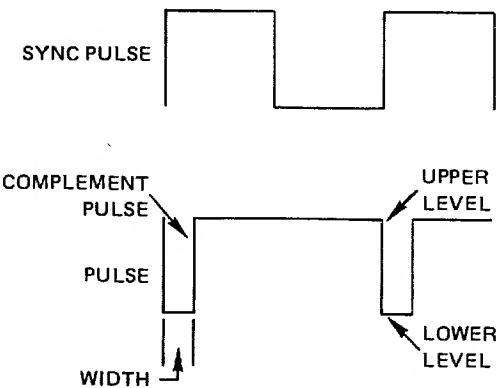


Figure 3-7. Greater Than 70% Duty Cycle Pulse

3.3.3 Externally Triggered Pulses

Set controls (and connectors) as follows:

Control	Operation
PERIOD Switch	TRIG
TRIG/GATE INPUT Connector	Apply TTL rectangular pulse
INT 50Ω Switch	ON
WIDTH Switch	Set to range desired (but not \square)
Other Controls	Set as desired.

3.3.4 Manually Triggered Pulses

Set controls (and connectors) as follows:

Control	Operation
PERIOD Switch	MAN TRIG
INT 50Ω Switch	ON

Control	Operation
WIDTH Switch	Set to range desired (but not ∞)
MAN TRIG	Push to trigger
Other Controls	Set as desired

3.3.5 Gated Pulses

Set up as in paragraph 3.3.1, except set the width of the TRIG GATE INPUT pulse to allow the desired number of output pulses.

3.3.6 Pulses With Width Controlled Externally

Set up as in paragraph 3.3.3, except set WIDTH switch to ∞ .

3.3.7 Double Pulses

For double pulses in any mode, additionally set controls as follows:

Control	Operation
DBL PULSE	ON
DELAY	Set for desired time between start of first pulse and second pulse of pulse pairs. (Since the same one-shot forms both pulses, a minimum recovery time is necessary.)

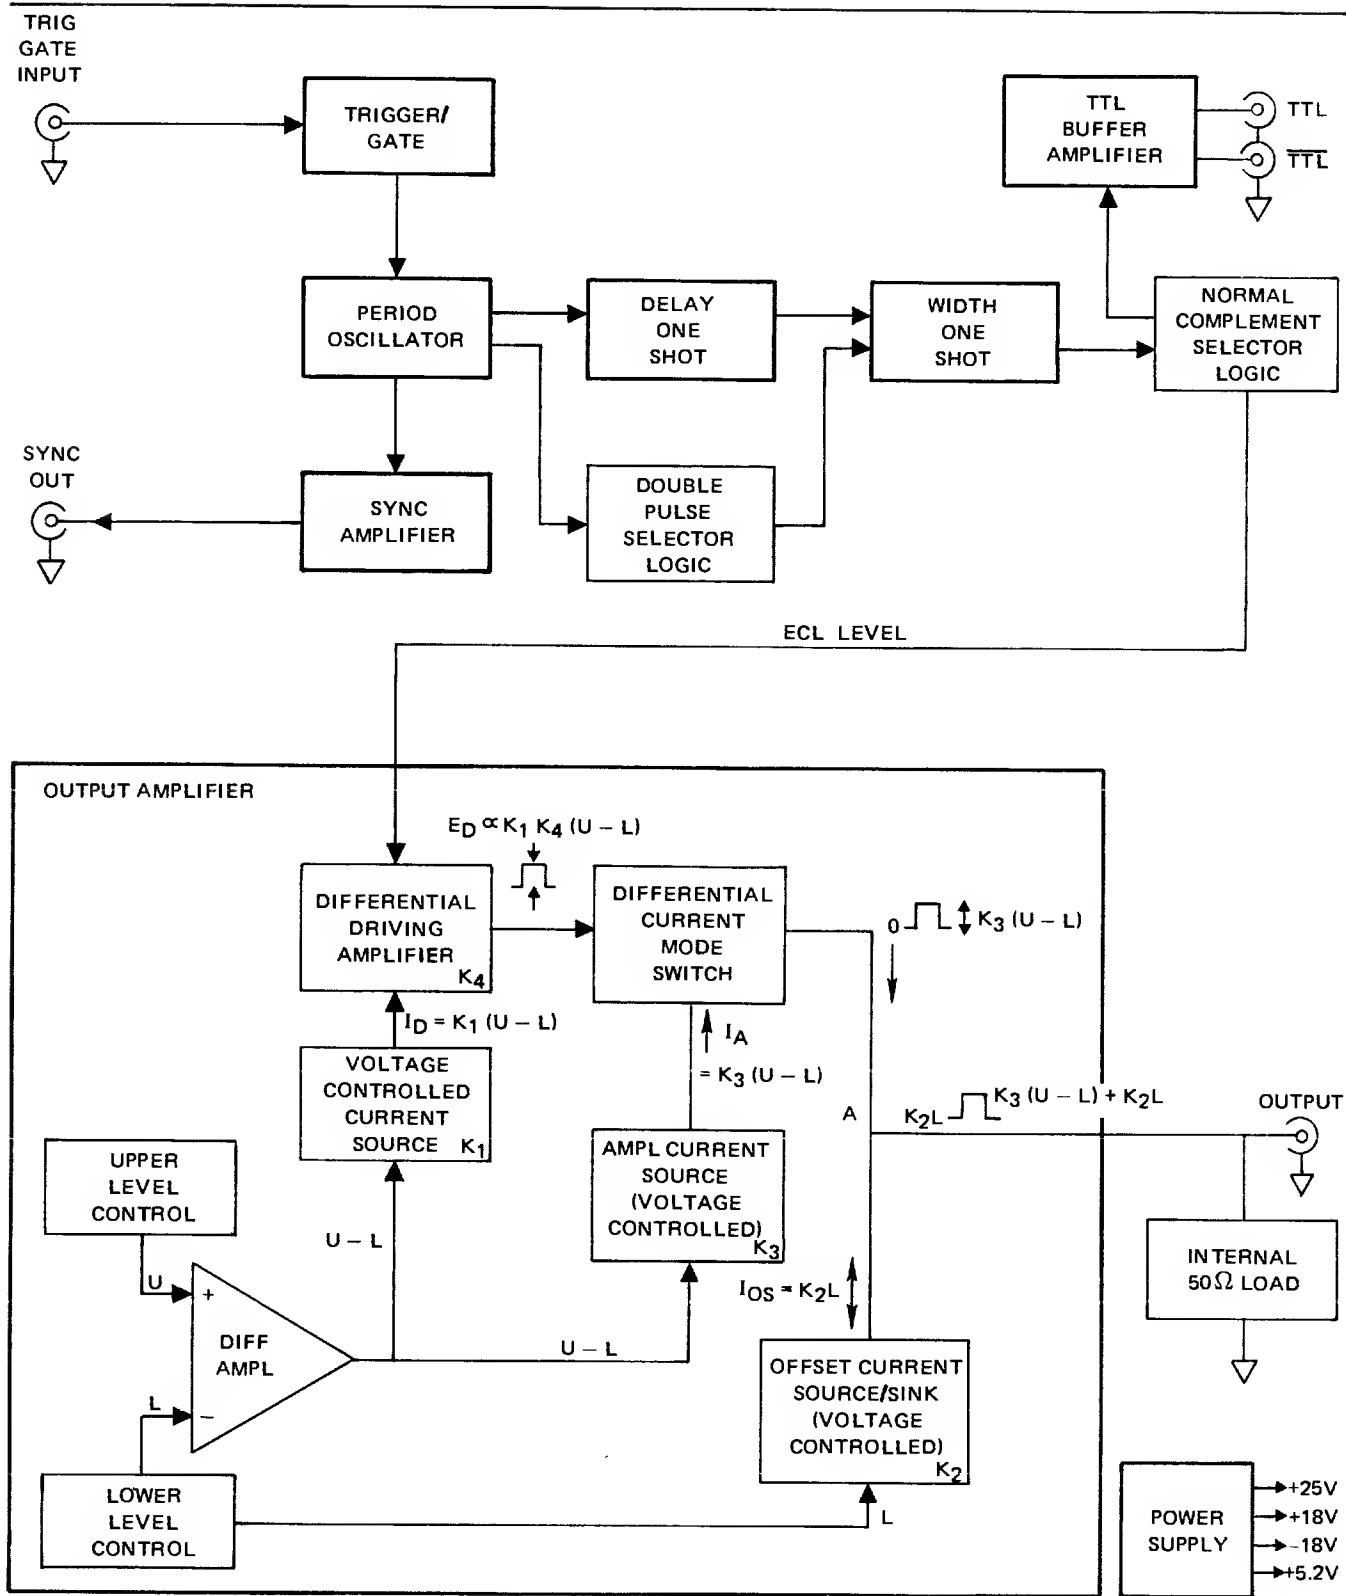


Figure 4-1. Overall Block Diagram

4

SECTION 4

CIRCUIT DESCRIPTION

4.1 OVERALL BLOCK DIAGRAM

The Model 802 is made up of eight major circuit blocks: trigger/gate circuit, period oscillator, sync amplifier, delay one shot, width one shot, TTL buffer amplifier, output amplifier, and a power supply. (See figure 4-1.)

All the circuitry is on one PC board with a combination of ECL logic gates and discrete semiconductor devices. The ECL logic, in addition to making up individual circuit blocks, serves as a signal coupling medium between the blocks. The signal path changes depending on the mode selected.

4.2 PERIOD OSCILLATOR

A simplified diagram of the period oscillator, an ECL multivibrator, appears in figure 4-2.

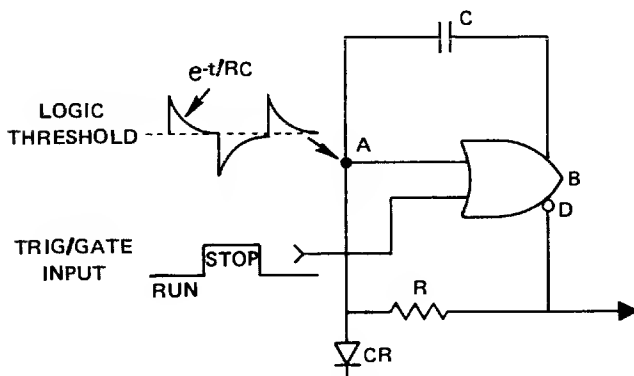


Figure 4-2. Simplified Diagram of the Period Oscillator

The RC time constant determines the charge and discharge rates for capacitor C and, therefore, the frequency of operation.

Positive feedback via the path through C results in a stable oscillator. Varying resistor R changes the frequency over a 10:1 range. Note that since the charging and discharging current are equal but opposite, the resulting waveform has a 50% duty cycle.

The oscillator may be gated via the trig/gate input. Whenever this input is high, it forces output D low and stops the oscillator. The oscillator starts synchronously when the input goes low.

4.3 TRIGGER/GATE CIRCUIT

The trigger circuit consists of an ECL gate connected to provide positive feedback which forms a Schmitt trigger. An input divider adjusts the trigger level to approximately +1.4V. This makes the input compatible with TTL logic. Triggering always occurs on the positive edge and the source can be either external or internal via the manual trigger switch.

The output of the trigger circuit is always connected to the oscillator. Gating occurs automatically. Whenever the input to the trigger circuit is 1.4V, it forces the trig/gate input of the oscillator high (figure 4-2) and stops the oscillator.

When the trigger mode is selected, node A of the oscillator is pulled low via diode CR. The IC now acts as an inverter to the trig/gate input and passes the signal on to the delay one shot.

4.4 SYNC CIRCUIT

The sync circuit acts as a buffer amplifier between the oscillator and the external equipment. It provides a TTL output level from a 50Ω source. The output from the sync circuit is an approximate square wave at the oscillator frequency.

When gating the generator, the sync signal should be taken from the gating source rather than the 802.

4.5 DELAY CIRCUIT

The delay one shot allows an adjustable time between the sync output and the leading edge of the final output pulse. The delay circuit consists of an ECL gate and discrete circuit one shot multivibrator. When the delay circuit is triggered by the oscillator, a timing capacitor is discharged by a constant current source until a threshold point is reached. The circuit then resets by rapidly recharging the timing capacitor. The output pulse from the ECL gate has a width proportional to the timing capacitor value and the magnitude of the current source. The pulse width is independent of the triggering rate as long as it is less than 70% of the trigger period.

4.6 WIDTH CIRCUIT

The width one shot determines the width of the output pulse. The width circuit, triggered by the trailing edge of the delay one shot, is identical in operation to the delay circuit. In the double pulse mode it is triggered on the leading and trailing edges of the delay one shot pulse. When the mode is selected, the delay and width one shots are disabled and the oscillator square wave passes through them to the output amplifier. An exclusive OR gate allows either phase of the width one shot output to be selected as the signal to drive the output amplifier.

4.7 TTL BUFFER AMPLIFIER

The output of the width one shot drives a current mode switch, the TTL buffer amplifier, in addition to the output amplifier. This switch is designed to drive TTL level signals into 50Ω loads. Both signal phases, TTL and $\overline{\text{TTL}}$, are available simultaneously.

4.8 OUTPUT AMPLIFIER

The output amplifier (figure 4-1) establishes the pulse lower level by passing a constant current through the 50Ω load. The current is provided by a voltage controlled current source programmed by the lower level control potentiometer. A current pulse of the proper amplitude is now added at node A to this base line for the duration of the width one shot time. The amplitude of the current pulse is equal to the difference between the upper and lower level controls ($U - L$). The upper level will be $(U - L) + L = U$ at the output.

In order to generate a current pulse, the width one shot drives a current mode switch via a driving amplifier. The current mode switch connects a current source to the load whenever the output of the width one shot is high. The current source is voltage controlled and its output is equal to the difference between the upper and lower level controls ($U - L$).

The output of the driving amplifier varies in amplitude directly with the output level programmed by the level controls. This prevents overdriving the current mode switch and distorting the output at low levels.

Note that changing the lower level control will change both the base line and the current pulse amplitude which will cause the upper level to remain fixed. That is $(U - L) + L = U$, regardless of the value of L .

The internal 50Ω load may be switched in or out depending on the application.

4.9 POWER SUPPLY

The power supply converts the line voltage to four regulated dc voltages which power all the other circuit blocks.

4.10 MODES OF OPERATION

The major circuit block connections depend on the mode of operation selected. Block diagrams of the major modes and key waveforms are shown in figures 4-3 through 4-8.

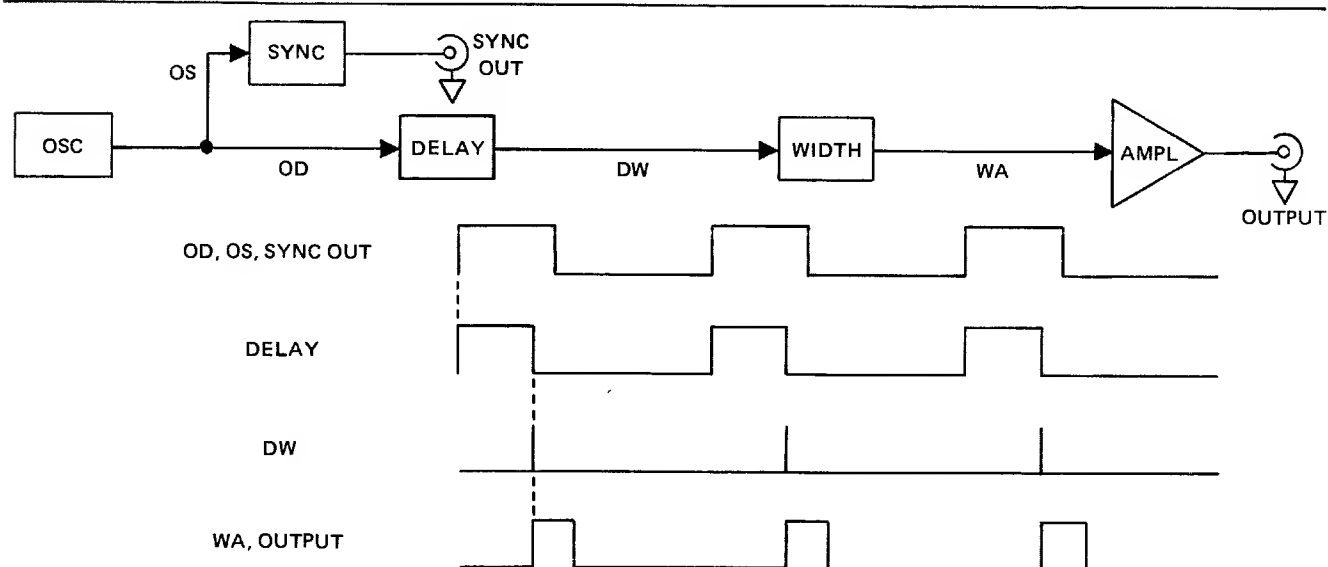


Figure 4-3. Continuous Mode

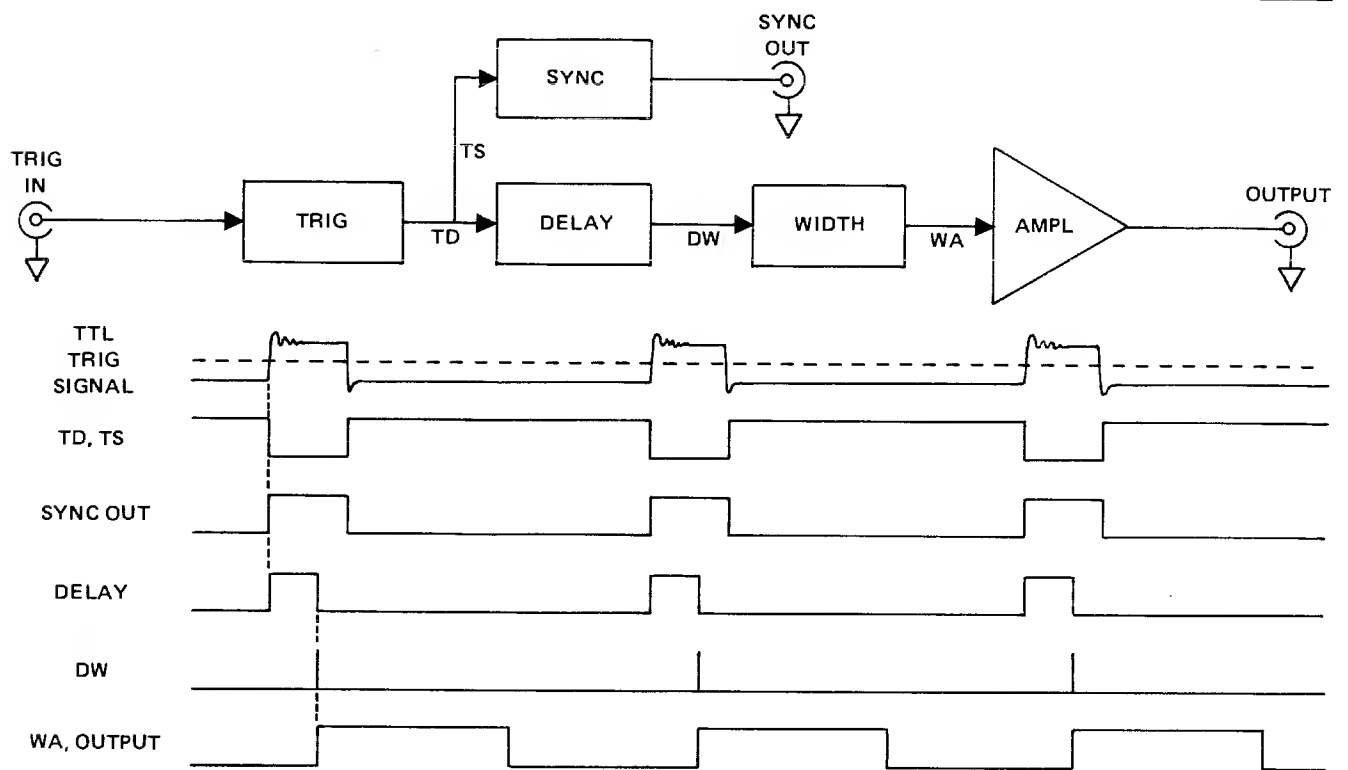


Figure 4-4. Trigger Mode

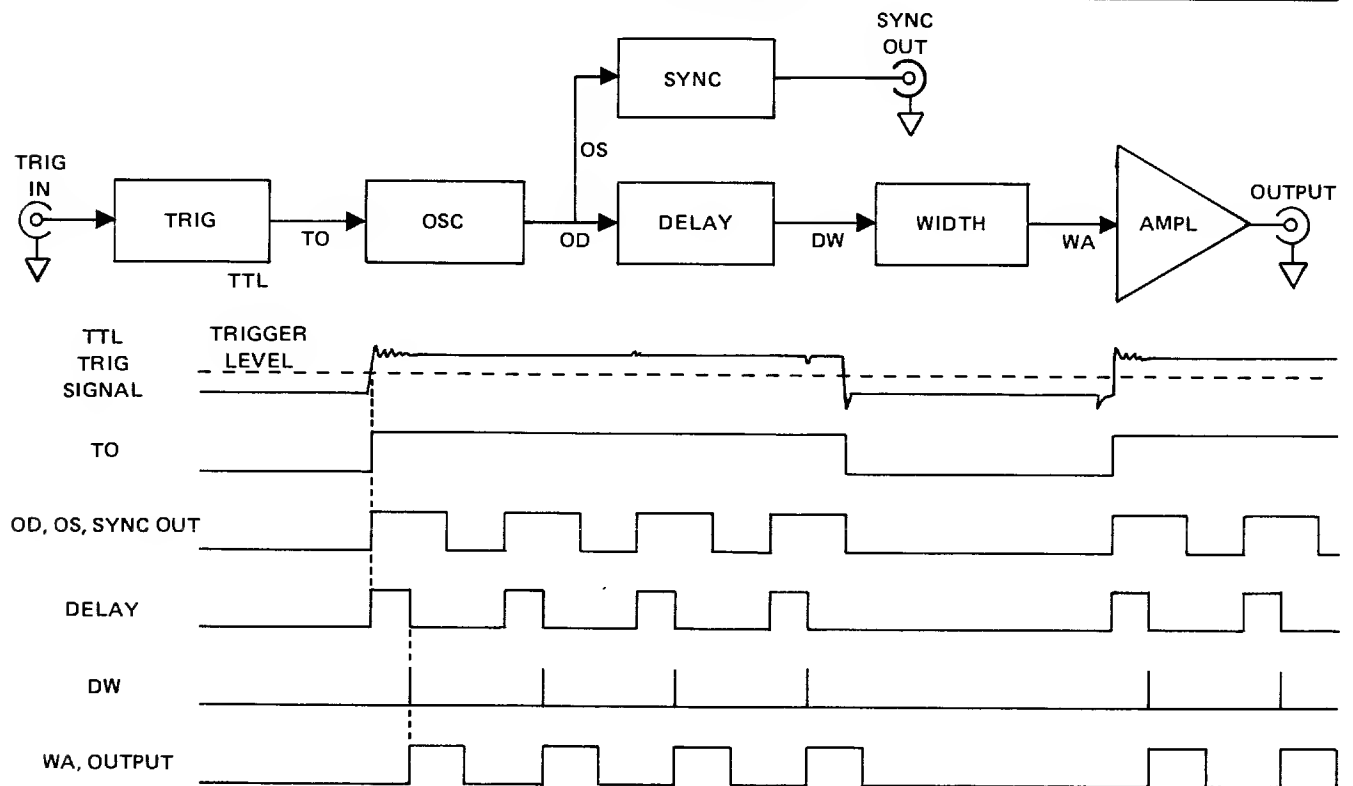


Figure 4-5. Gate Mode

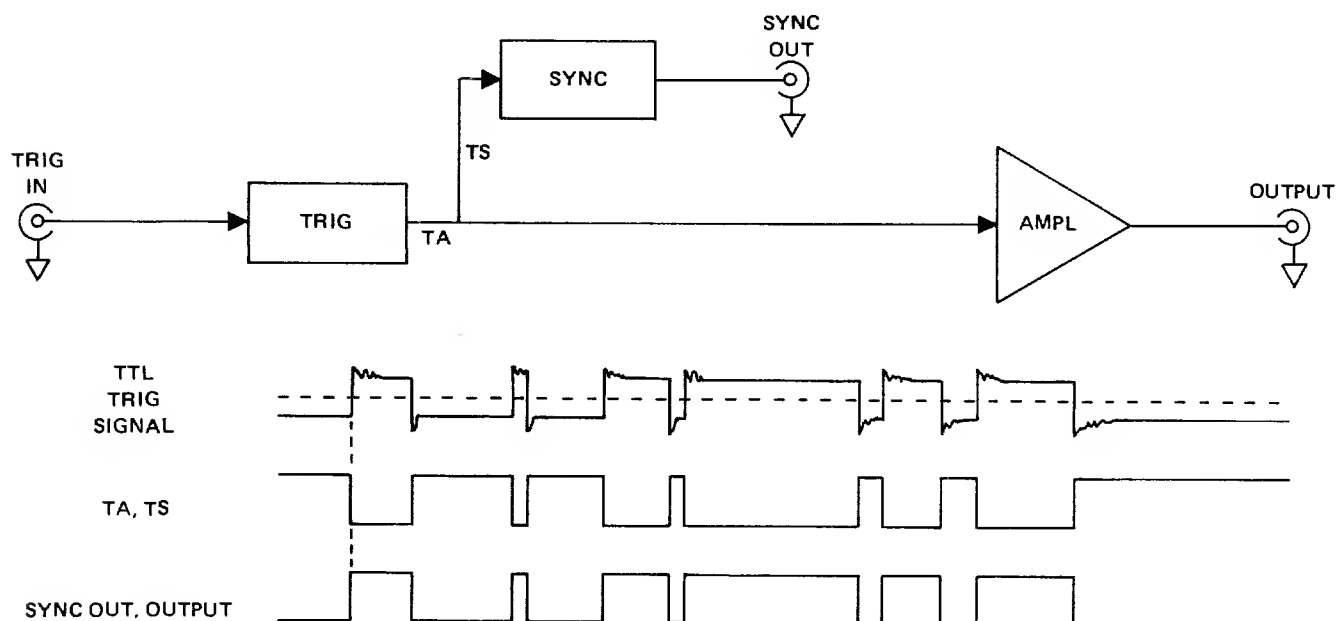


Figure 4-6. External Width Mode

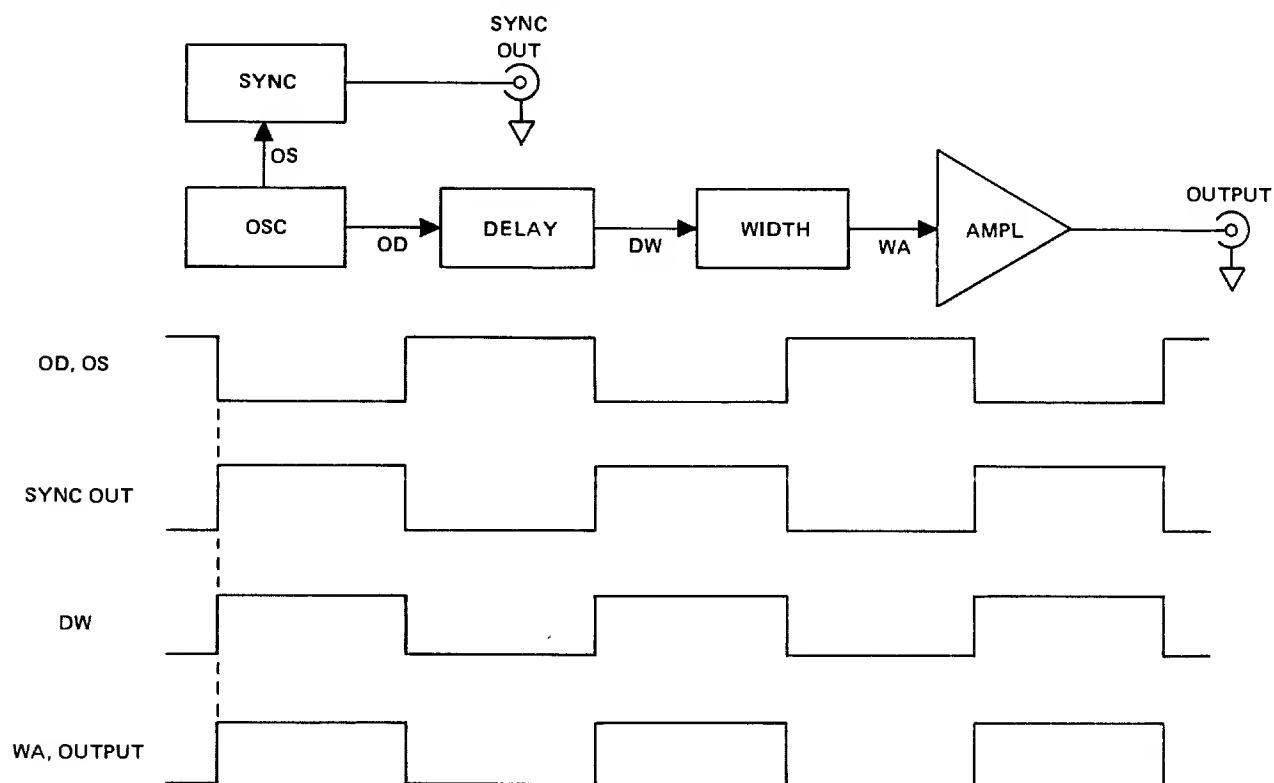


Figure 4-7. Continuous Square Wave Mode



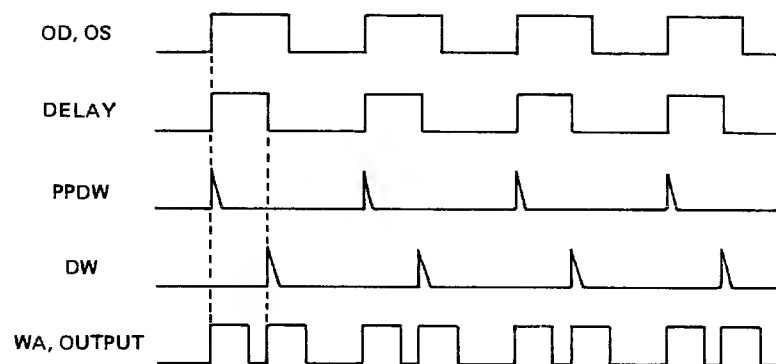


Figure 4-8. Continuous Double Pulse Mode

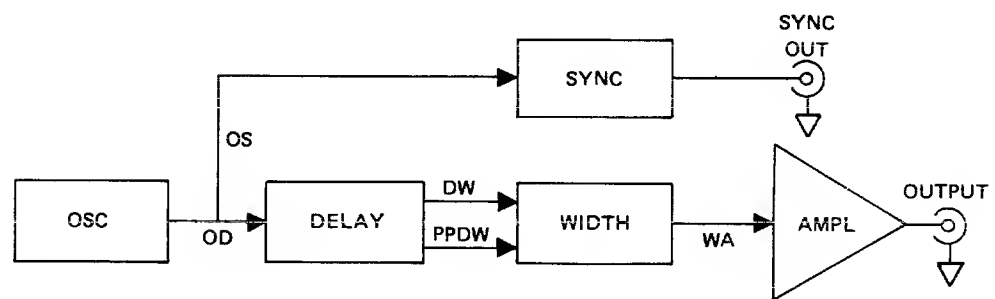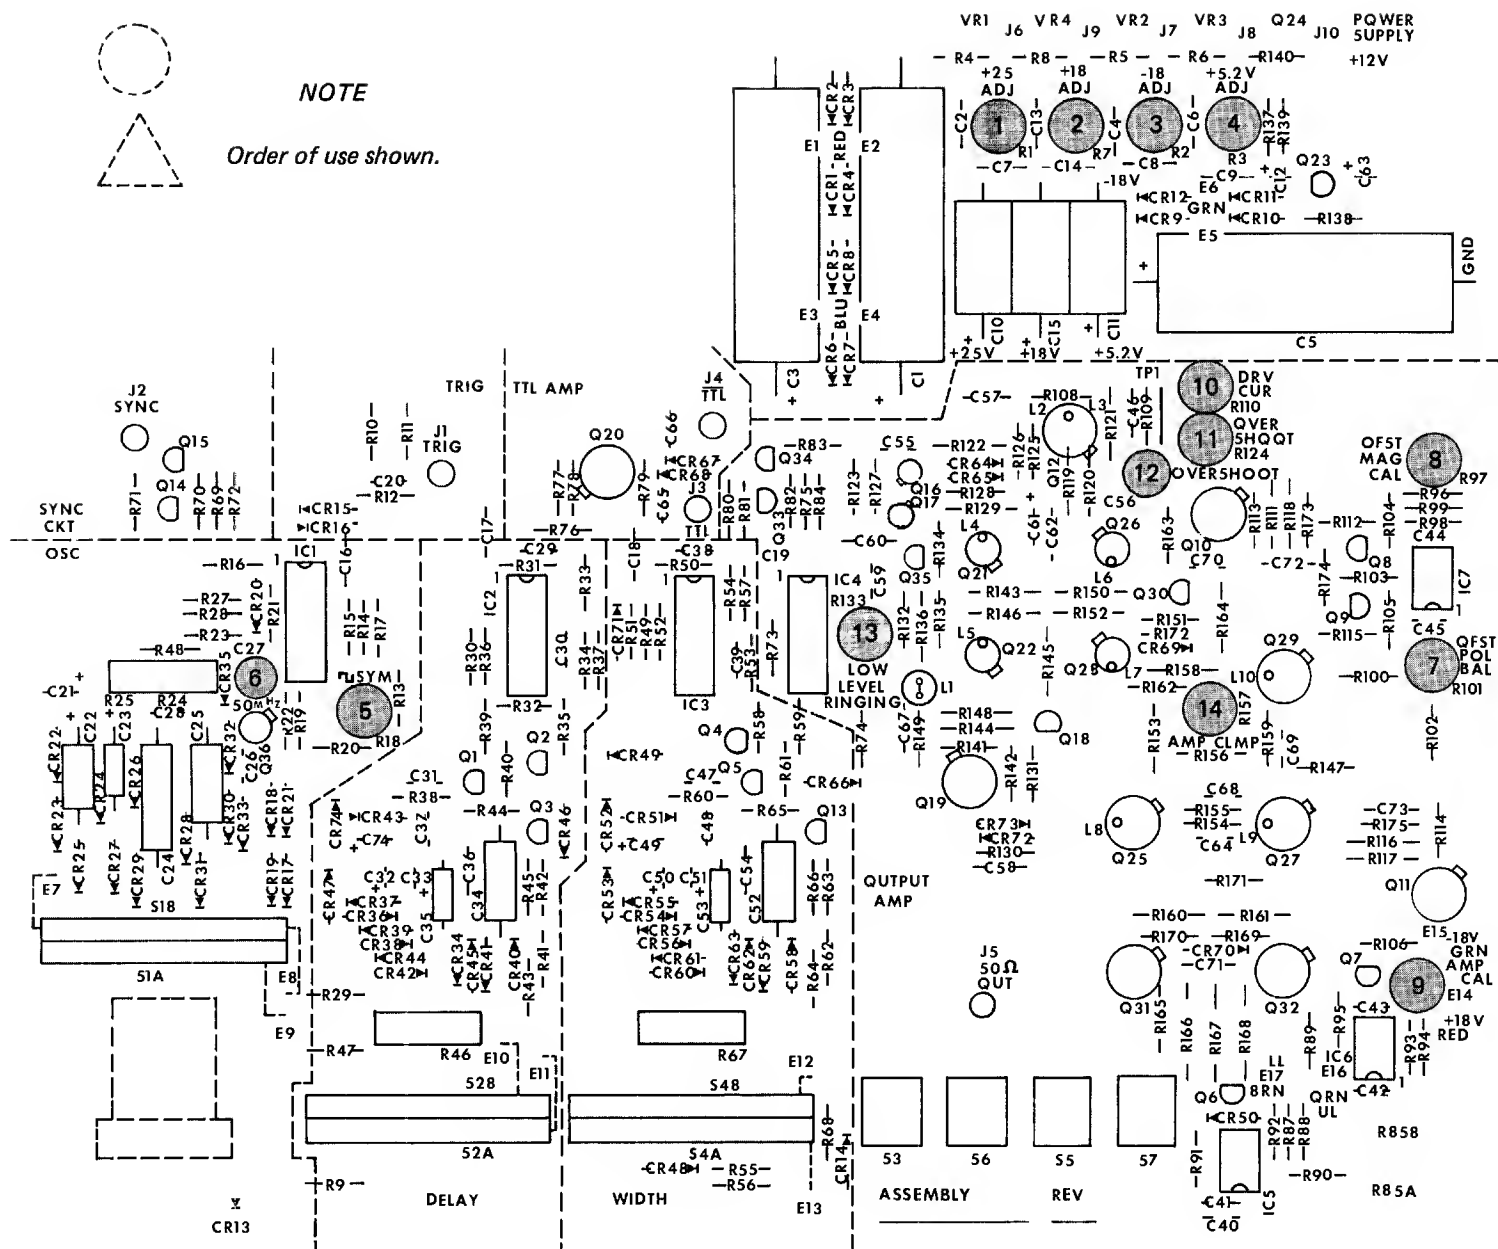

MOD 802
0100-00-0630-3C

Figure 5-1. Calibration Points

5

SECTION 5

CALIBRATION

5.1 FACTORY REPAIR

Wavetek maintains a factory repair department for those customers not possessing the necessary personnel or test equipment to maintain the instrument. If an instrument is returned to the factory for calibration or repair, a detailed description of the specific problem should be attached to minimize turnaround time.

5.2 REQUIRED TEST EQUIPMENT

Voltmeter Millivolt dc measurement (0.1% accuracy)
 Oscilloscope, Dual Channel 500 MHz bandwidth
 Oscilloscope, Sampling 1 GHz bandwidth
 Counter 55.0 MHz (0.01% accuracy)
 50 Ω Feedthru $\pm 0.1\%$ accuracy, 2W (3 ea)
 10X 50 Ω Feedthru Attenuator $\pm 0.1\%$ accuracy, 2W
 Function Generator 5 kHz $\sqrt{}$, 4V p-p
 RG58U Coax Cable 3 ft length BNC male contacts
 BNC Tee 1 male, 2 female connectors

5.3 REMOVING GENERATOR COVERS

1. Invert the instrument and remove the four screws in the cover.
2. Turn the instrument upright, remove the top cover, and remove the four screws securing the bottom cover.
3. Replace the cover and turn the instrument upside down.

NOTE

Remove the cover only when it is necessary to make adjustments or measurements.

5.4 CALIBRATION

After referring to the following preliminary data, perform calibration, as necessary, per table 5-1. If performing partial calibration, check previous settings and adjustments for applicability. See figure 5-1 for calibration point location.

1. Unless otherwise noted, all measurements made at the TTL, $\overline{\text{TTL}}$ or OUTPUT connectors must be terminated into a 50 Ω ($\pm 0.1\%$) load.

2. Start the calibration by connecting the unit to an ac source and setting the front panel switches as follows:

PERIOD 200 ns \downarrow 2 μ s
 PERIOD VERNIER Full cw
 PULSE MODE OFF
 DELAY OFF
 WIDTH \square
 LOWER LEVEL -10V
 UPPER LEVEL +10V

3. Allow the unit to warm up at least 30 minutes for final calibration. Keep the instrument covers on to maintain heat. Remove covers only to make adjustments or measurements.

Table 5-1. Calibration Chart

Step	Check	Tester	Cal Points	Control Settings	Adjust	Desired Results	Remarks
1	Power Supply	DVM	—	—	R1	+25V ± 0.10 V	
2			—	—	R7	+18V ± 0.05 V	
3			—	—	R2	-18V ± 0.05 V	
4			—	—	R3	+5.2V ± 0.05 V	

Table 5-1. Calibration Chart (Continued)

Step	Check	Tester	Cal Points	Control Settings	Adjust	Desired Results	Remarks
5	Duty Cycle	Scope	TTL	R157: Full cw	R18	50% duty cycle $\pm 0.5\%$	
6				PERIOD: 20 ns \parallel 200 ms PERIOD VERNIER: Full ccw	C27	51 MHz (19.6 ns)	
7	Output Amplifier	DVM	OUTPUT	PERIOD: TRIG COMP: ON LOWER LEVEL: Full cw, then full ccw	R101	Equal cw & ccw voltage	
8				LOWER LEVEL: Full cw	R97	+10.5V $\pm 0.05V$	Repeat steps 7 and once.
9				LOWER LEVEL: 0V on DVM			Loosen and realign LOWER LEVEL knob at 0V, if necessary.
10				UPPER LEVEL: Full cw COMP: OFF	R107	+10.5V $\pm 0.05V$	
11				UPPER LEVEL: 0V on DVM			Loosen and realign UPPER LEVEL knob at 0V, if necessary. Make sure mechanical interlock on knob is engaged.
12			TP1	UPPER LEVEL: Full cw	R110	-0.6V $\pm 0.05V$	
13	Overshoot & Ringing	Scope	OUTPUT	INT 50 Ω : ON LOWER LEVEL: 0V	R124 C56	Minimum overshoot & ringing	
14				UPPER LEVEL: +0.5V	R133	Minimum ringing	Repeat steps 13 and 14 once.
15	Overshoot & Rise Time			UPPER LEVEL: Full cw LOWER LEVEL: Make a +5V pulse	R157	Minimum overshoot	Maintain $\geq 5.1V$ pulse and ≤ 5 ns rise time. A slight readjustment of R110 may be necessary.

6

SECTION 6

TROUBLESHOOTING

6.1 INTRODUCTION

This section is organized as follows:

- Safety
- Circuit Board Access
- Basic Techniques
- Troubleshooting Individual Components
- Flow Charts

Refer to paragraph 5.2 for required test equipment.

NOTE

Wavetek maintains a factory repair department for those customers not possessing the necessary personnel or test equipment to maintain the instrument. If an instrument is returned to the factory for calibration or repair, a detailed description of the specific problem should be attached to minimize turnaround time.

6.2 SAFETY

6.2.1 Precautions

Refer all servicing and calibration to a qualified electronic technician.

Always disconnect the power cord when working on this instrument, unless electrical measurements are being taken. Never attempt to isolate the safety ground lug of the power cord.

Be sure that the fuse rating is correct and that the line voltage selector card is set to the proper range (refer to section 2).

Line voltage is present on the circuit board of the ac power connector, *even when the power switch is off*. This voltage is only accessible if the shield is removed from the ac power connector.

6.2.2 Safety Check

Disconnect the power cord from facility power and check that the resistance from the cord earth ground terminal to

the instrument front panel metal is less than one ohm. Press the power switch on and measure the resistance between the instrument front panel metal and each of the power cord's two matching terminals. Resistance to each terminal should be greater than two megohms. Check the fuse for proper type and value. Remove the instrument covers and inspect the power supply and circuit boards for evidence of overheating or arcing. Check lines and cables for good physical connections. Correct any discrepancies detected.

6.3 CIRCUIT BOARD ACCESS

Remove the top cover (paragraph 5.3) for access to the circuit board. Remove the four screws securing the board to the bottom cover for access to the bottom of the board.

6.4 BASIC TECHNIQUES

Troubleshooting requires no special technique. Listed below are a few reminders of basic electronic fault isolation.

1. Check control settings carefully. Many times a seemingly malfunction is an incorrect control setting, or a knob that has loosened on its shaft.
2. Check associated equipment connections. Make sure that all connections are securely connected to the correct connector.
3. Perform the calibration procedure. Many out-of-specification indications can be corrected by performing specific calibration procedures.
4. Visually check the interior of the instrument. Look for such indications as broken wires, charred components and loose leads.
5. Try to isolate the problem to a specific circuit by checking generator operation in all modes and referring to the block diagrams for each mode (see figures 4-3 thru 4-8). After the problem has been isolated to a specific stage, check the dc operating voltages at the pins of all solid state devices within that stage.
6. Check the associated passive elements with a high impedance ohmmeter (instrument unplugged) before replacing a suspected semiconductor device.

6.5 TROUBLESHOOTING INDIVIDUAL COMPONENTS

6.5.1 Transistor

A transistor is defective if more than one volt is measured across its base emitter junction in the forward direction.

A transistor when used as a switch may have a few volts reverse bias voltage base to emitter.

If the collector and emitter voltages are the same, but the base emitter voltage is less than 500 mV forward voltage (or reversed bias), the transistor is defective.

A transistor is defective if its base current is larger than 10% of its emitter current (calculate currents from voltage across the base and emitter series resistors).

6.5.2 Diode

A diode is defective if there is greater than 1 volt (typically 0.7 volts) forward voltage across it (except Zener and LED).

6.5.3 Operational Amplifier

The "+" and "-" inputs of an operational amplifier will have less than 15 mV voltage difference when operating under normal conditions.

If the output voltage stays at maximum positive, "+" input voltage should be more positive than "-" input voltage, or vice versa; otherwise, the operational amplifier is defective.

6.5.4 FET Transistor

No gate current should be drawn by the gate of an FET transistor. If so, the transistor is defective.

The gate-to-source voltage is always reverse biased under a normal operating condition; e.g., the source voltage is more positive than the gate voltage for 2N5485, and the source voltage is more negative than gate voltage for a 2N5462. Otherwise, the FET is defective.

6.5.5 MOSFET Transistor

For MOSFET's such as the SD214 or SD215, a positive gate source voltage causes the device to conduct drain current. Zero volts or a negative voltage cause the device to pinch off. A MOSFET transistor can be damaged by a static charge

buildup when out of the circuit. Keep MOSFET leads shorted together until soldered in the circuit board.

6.5.6 Capacitor

Shorted capacitors have zero volts across their terminals.

An unopened capacitor can be located (but not always) by using a good capacitor connected in parallel with the capacitor under test and observing the resulting effect.

6.5.7 ECL Gate

The emitter coupled logic using NOR logic is:

Inputs		NOR Output	Exclusive OR Output
A	B	$C = A + B$	$C = A \oplus B$
0	0	1	1
0	1	0	0
1	0	0	0
1	1	0	1

The levels are:

"0" = +3.4V \pm 0.1V

"1" = +4.3V \pm 0.1V

Never short the output of an ECL gate to ground; this will damage the output transistor in the gate. Any input may be pulled high, even when driven by an output of another gate, by connecting a diode between the input and the +5.2V supply (anode to supply).

6.6 FLOW CHARTS

The flow charts (see figures 6-1 thru 6-6) help isolate any malfunction to a specific stage. If you already know the specific circuit block at fault, go directly to that block in the flow chart. If a problem cannot be isolated to a portion of a flow chart, then follow the flow chart from the beginning.

If the problem cannot be located, return the instrument to the factory for servicing, with a description of the failure.

Before performing flow chart troubleshooting, set the front panel controls as follows:

PERIOD 2 μ s | 20 μ s
 PERIOD VERNIER 12 o'clock
 DELAY 10 ns | 100 ns
 DELAY VERNIER 12 o'clock
 WIDTH 100 ns | 1 μ s
 WIDTH VERNIER 12:00
 LOWER LEVEL -10V
 UPPER LEVEL +10V
 DBL PULSE OFF
 COMP OFF
 INT 50 Ω ON

Connect both the sync and the output BNC's to an oscilloscope with 3 foot 50 Ω cables terminated with 50 Ω feed-throughs.

When troubleshooting the output amplifier, the flow chart in figure 6-6 should be followed. In addition, tables 6-1 and 6-2 provide additional guidance as to what voltages exist at the semiconductor devices and how they should vary with the output level controls.

Table 6-1. Level Control Dependent Voltages








Level Control Knob Setting	Output Waveform Into 50 Ω	E17 Voltage Upper Level	E16 Voltage Lower Level	TP1	IC7-6	Emitter of Q6	Emitter of Q19
	+10 —————	-18	-18	-18	-3.6	+8.1	+22
	+10 ——— 0 ———	-18	0	-0.6	0	+8.1	+22
	+ 5 ——— - 5 ———	-9	+9	-0.6	+1.8	+8.1	+22
	0 —————	0	0	-18	0	0	+25
	0 ——— -10 ———	0	+18	-0.6	+3.6	+8.1	+22
	-10 —————	+18	+18	0	+3.6	0	+25

Table 6-2. Transistor Voltages

NOTE

These voltages apply with the controls set as follows.

PERIOD TRIG
 DELAY OFF
 WIDTH 
 COMP OFF
 DBL PULSE OFF
 INT 50Ω ON
 UPPER LEVEL Max cw
 LOWER LEVEL OV

Transistor	B	C	E	Transistor	B	C	E
Q6	+8.7	+20.8	+8.1	Q22	+18.6	+12	+20.5
Q7	-0.6	-0.6	0	Q23	+10.8	0	+11.4
Q8	0	+18	≈ 0	Q24	+11.4	0	+12.0
Q9	0	-18	≈ 0	Q25	+12.0	+10.0	+12.6
Q10	+18	+13	+18	Q26	+15.2	+13.0	+15.8
Q11	-18	-13	-18	Q27	+12.0	+10.0	+12.6
Q12	-0.6	+0.3	-1.2	Q28	+15.2	+13.0	+15.8
Q16	+4.3	+6.4	+3.7	Q29	+12.0	+10.0	+12.6
Q17	+3.4	+9.8	+3.7	Q30	+14.6	+12.0	+15.2
Q18	+20.8	21.4	+21.4	Q31	-12.0	+10.0	-12.6
Q19	+21.4	21.4	+22.0	Q32	-12.0	+10.0	-12.6
Q21	+18.6	+12	+20.5	Q35	+18.0	+12.0	+18.6

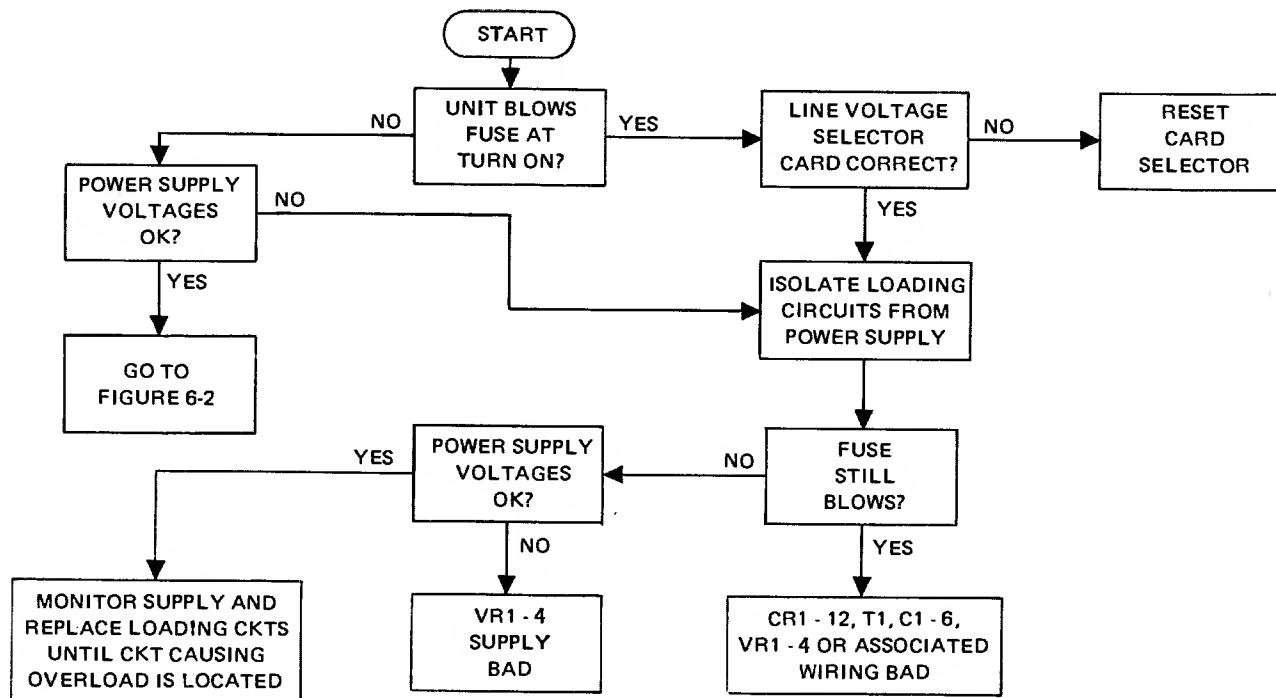


Figure 6-1. Power Supply Troubleshooting

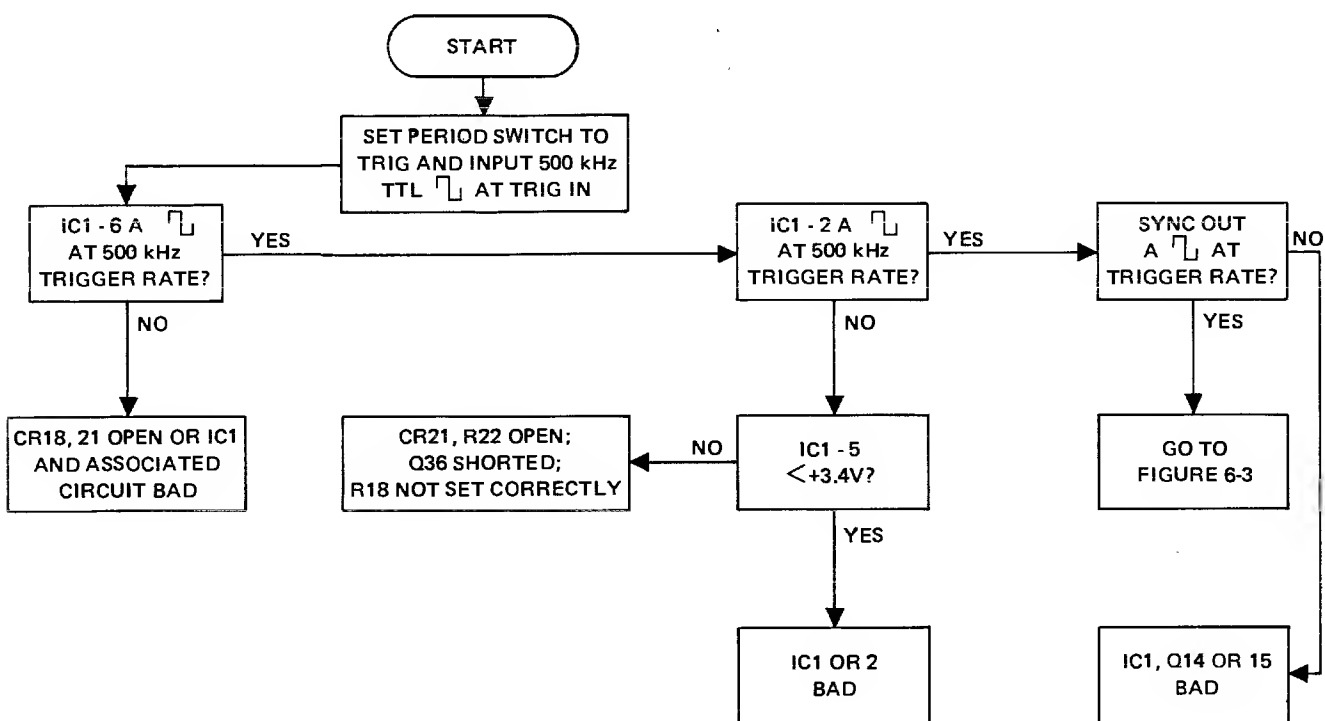


Figure 6-2. Trigger Circuit Troubleshooting

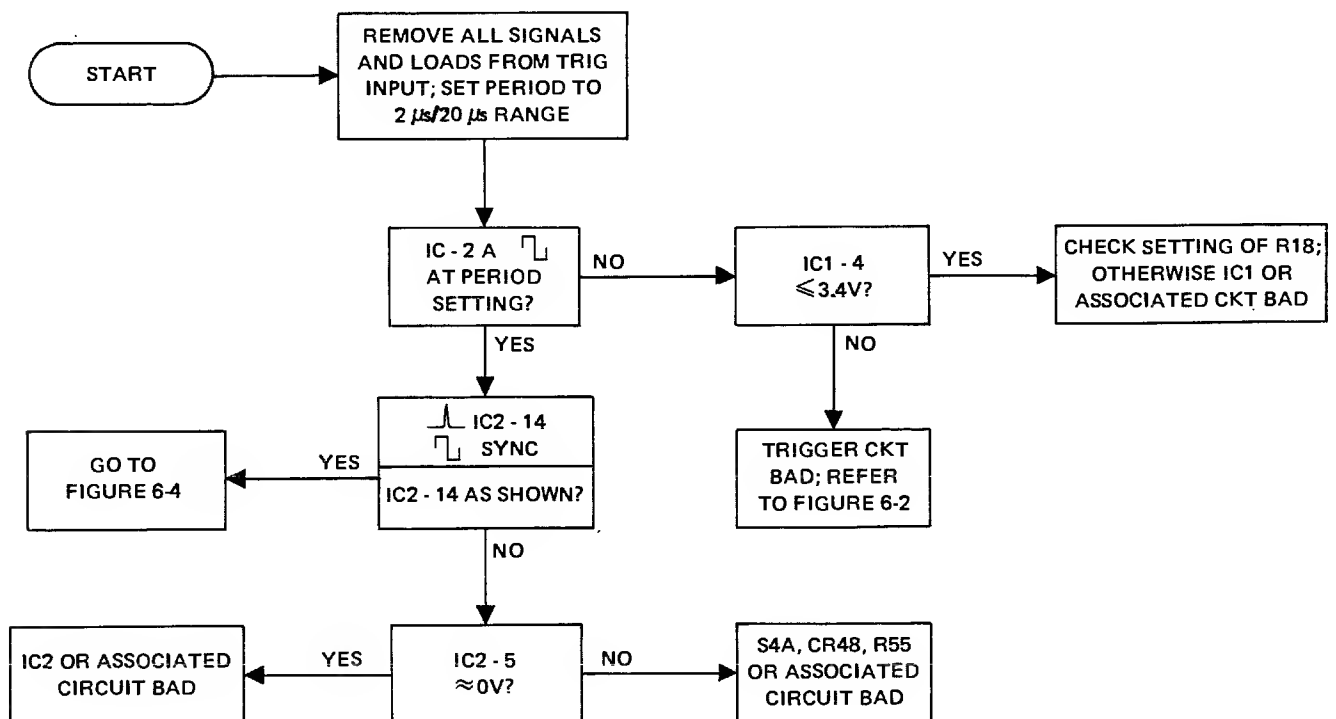


Figure 6-3. Oscillator Troubleshooting

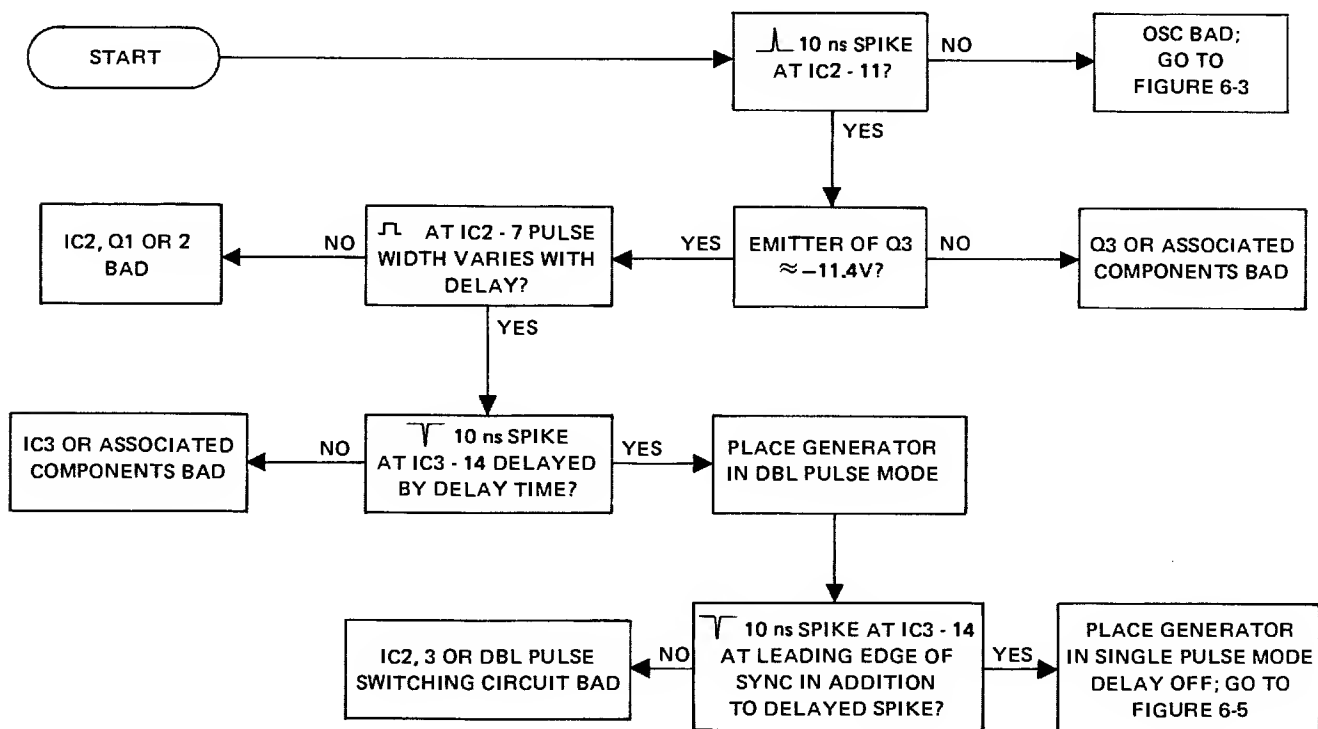


Figure 6-4. Delay Circuit Troubleshooting

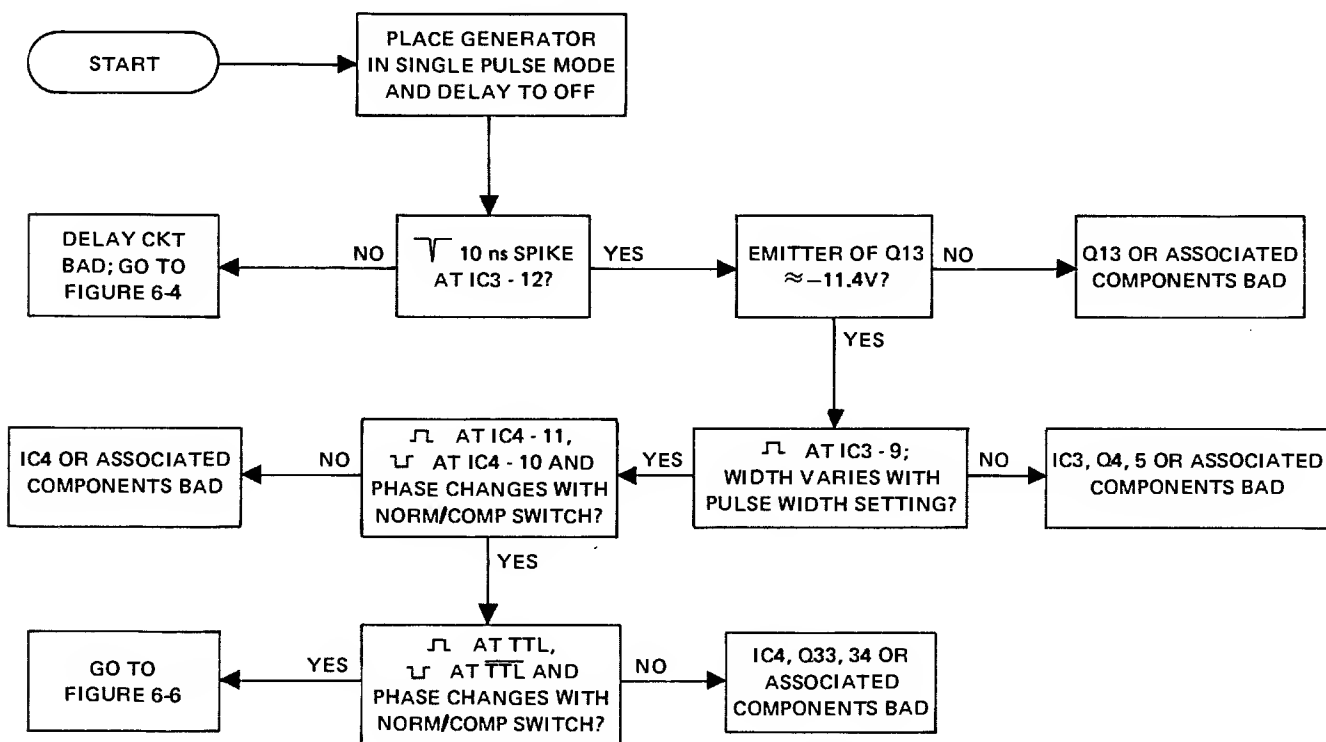


Figure 6-5. Width Circuit Troubleshooting

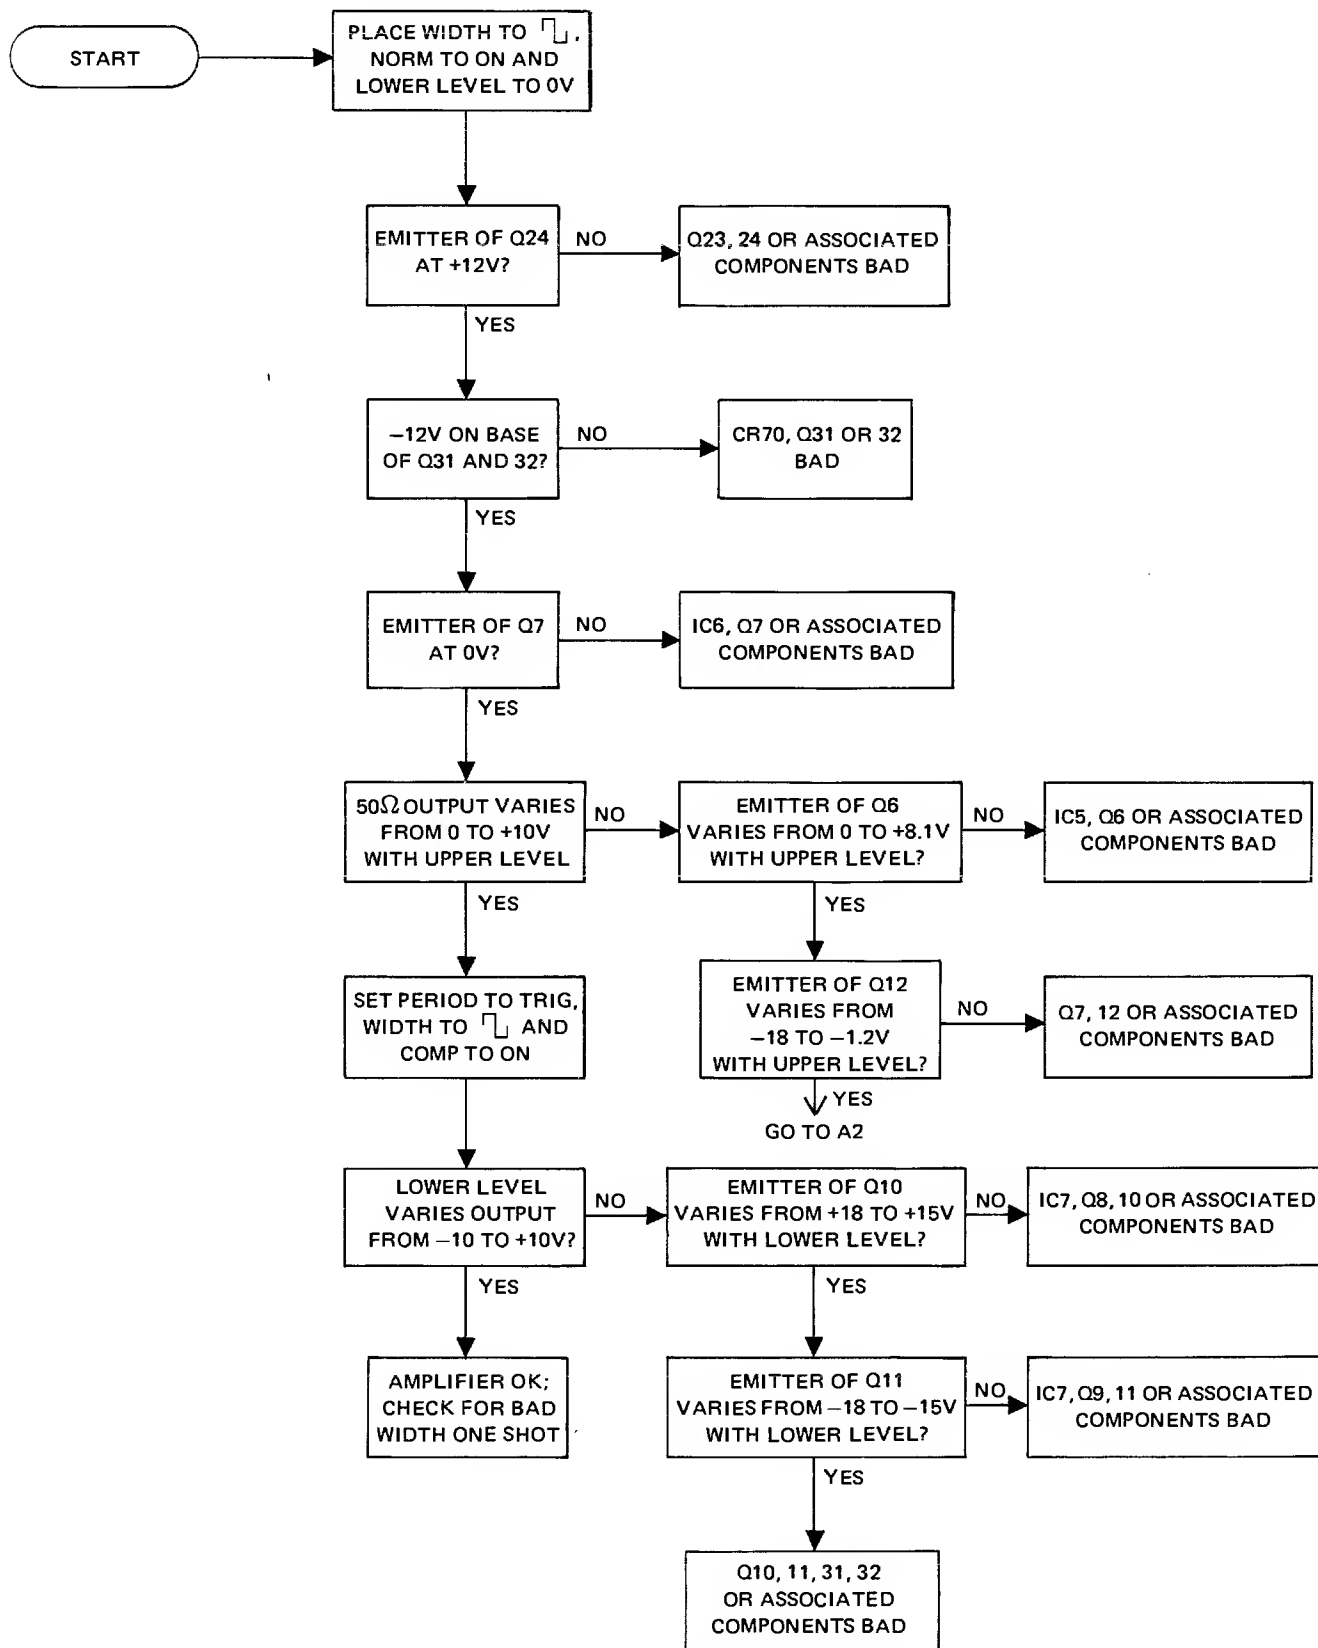


Figure 6-6. Output Amplifier Troubleshooting

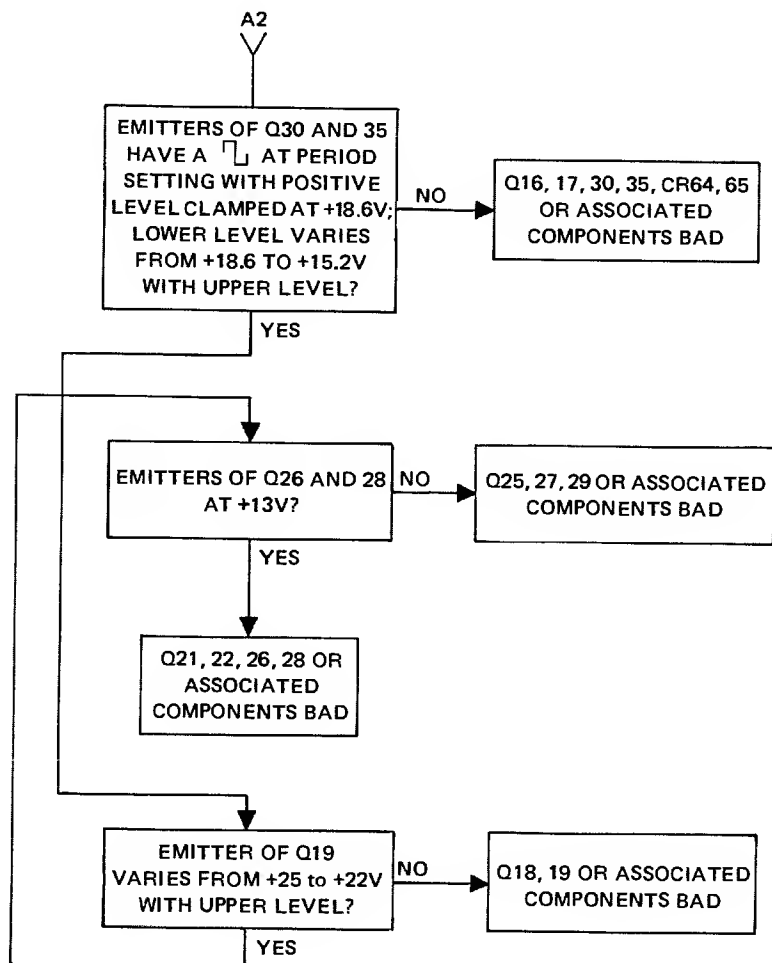


Figure 6-6. Output Amplifier Troubleshooting (Continued)

7

SECTION

PARTS AND SCHEMATICS

7.1 DRAWINGS

The following assembly drawings, parts lists and schematics are in the arrangement shown below.

7.2 ORDERING PARTS

When ordering spare parts, please specify part number, circuit reference, board, serial number of unit and the function performed.


7.3 ADDENDA

Under Wavetek's product improvement program, the latest electronic designs and circuits are incorporated into each Wavetek instrument as quickly as development and testing permit. Because of the time needed to compose and print instruction manuals, it is not always possible to include the most recent changes in the initial printing. Whenever this occurs, addendum pages are prepared to summarize the changes made and are inserted immediately inside the cover.

Drawing	Drawing No.	Drawing	Drawing No.
Instrument Schematic	0004-00-0119	Main Board Assembly	0101-00-0630
Chassis Assembly	0102-00-0631	Main Board Schematic	0103-00-0630
Chassis Parts List	1101-00-0631	Main Board Parts List	1100-00-0630

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.


REV	ECN	BY	DATE	APP
A	ECN 1713	RO	11/1/97	

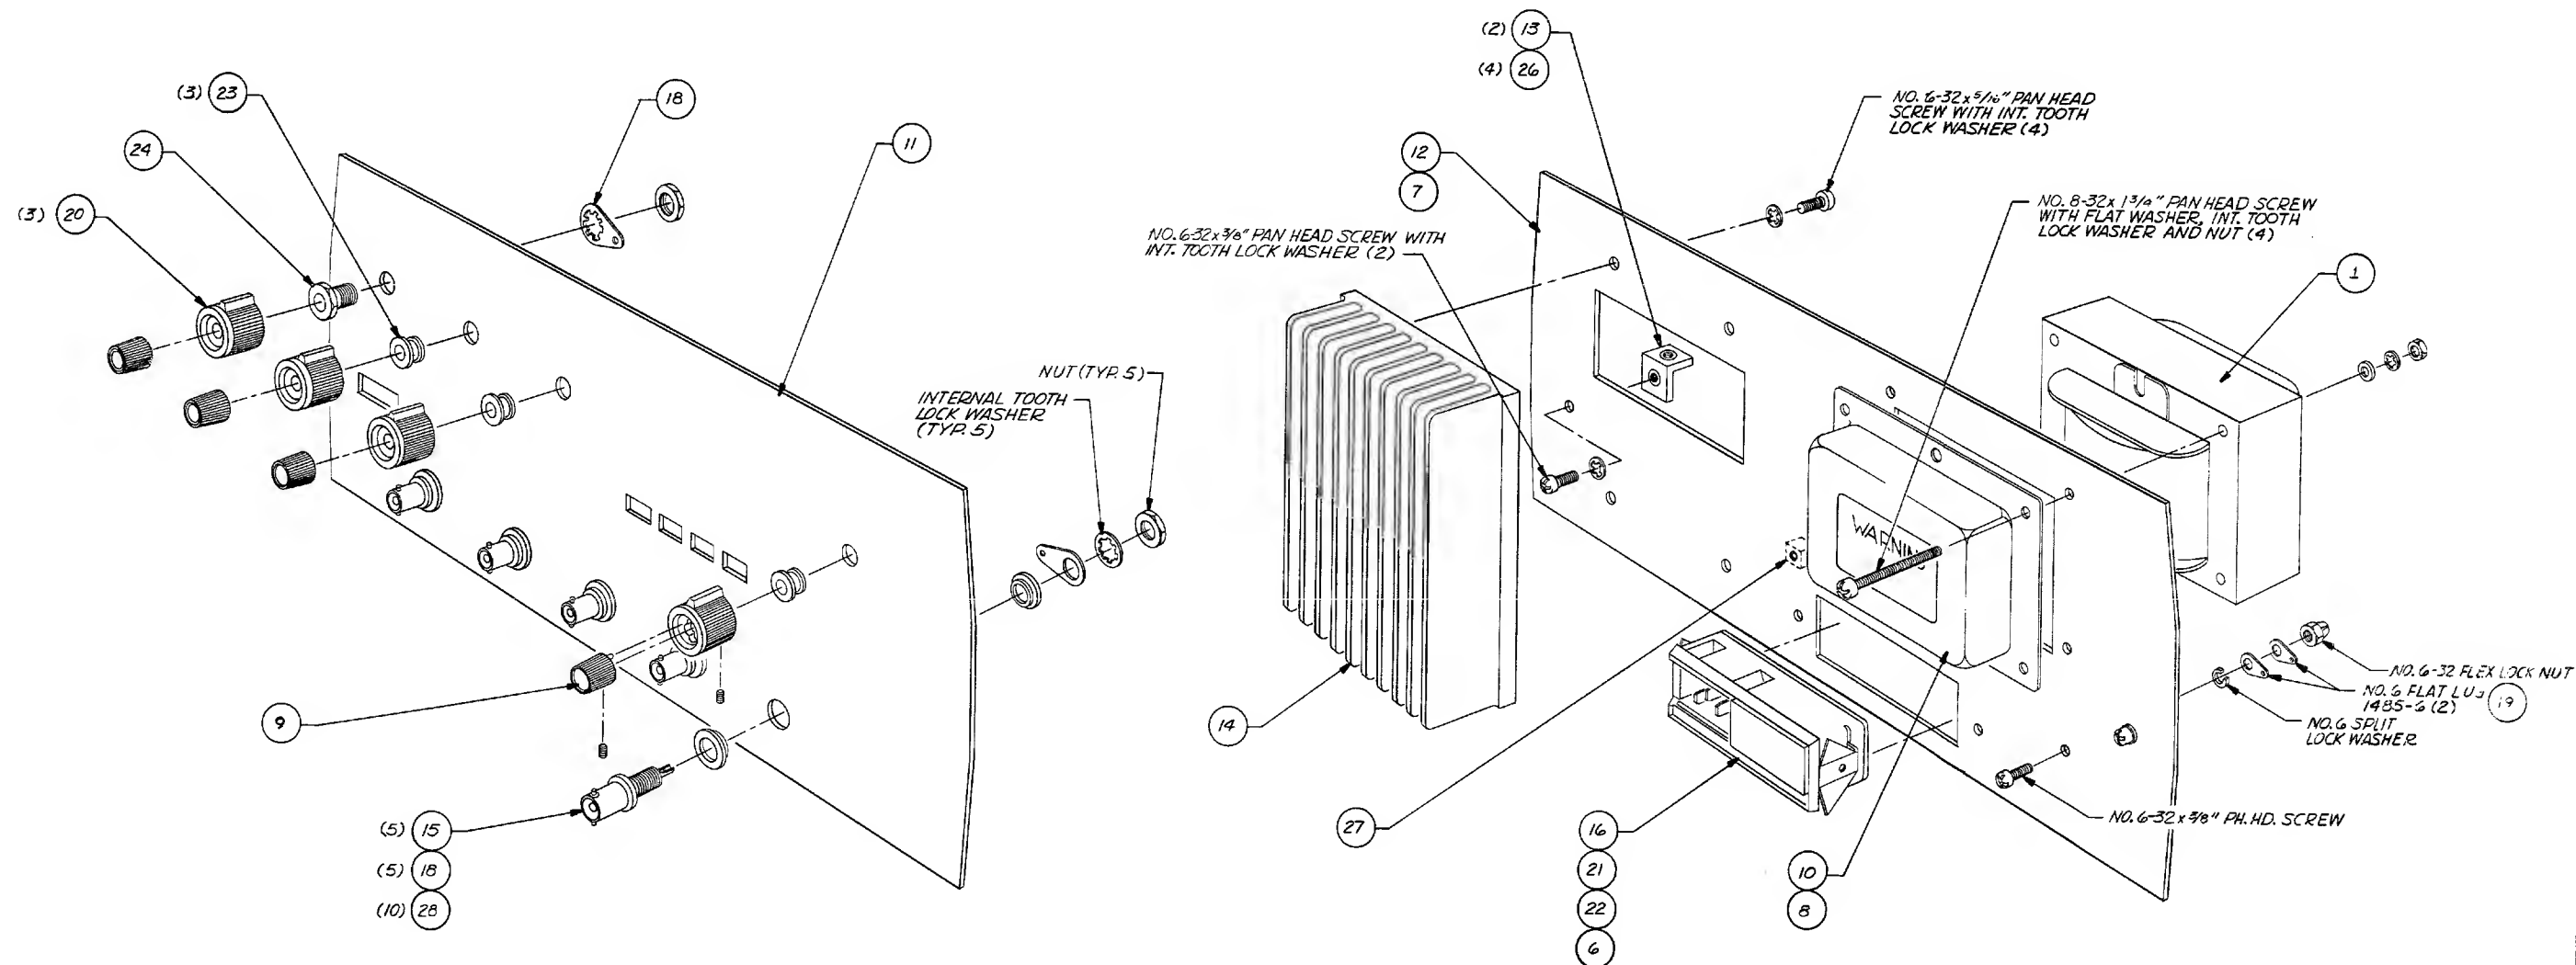

NOTE: UNLESS OTHERWISE SPECIFIED

REMOVE ALL BURRS AND BREAK SHARP EDGES	DRAWN D. COOPER	DATE 9/19/97	WAVETEK SAN DIEGO • CALIFORNIA ASSEMBLY CHASSIS
MATERIAL	PROJ ENGR RON CONERO	11/1/97	
	RELEASE APPROV RON CONERO	11/2/97	
	TOLERANCE UNLESS OTHERWISE SPECIFIED XXX .010 ANGLES :1 XX .030		
FINISH WAVETEK PROCESS	DO NOT SCALE DWG	MODEL NO. 802	DWG NO. 0102-00-0631
	SCALE	CODE IDENT 23338	REV A
		SHEET 1 OF 2	

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

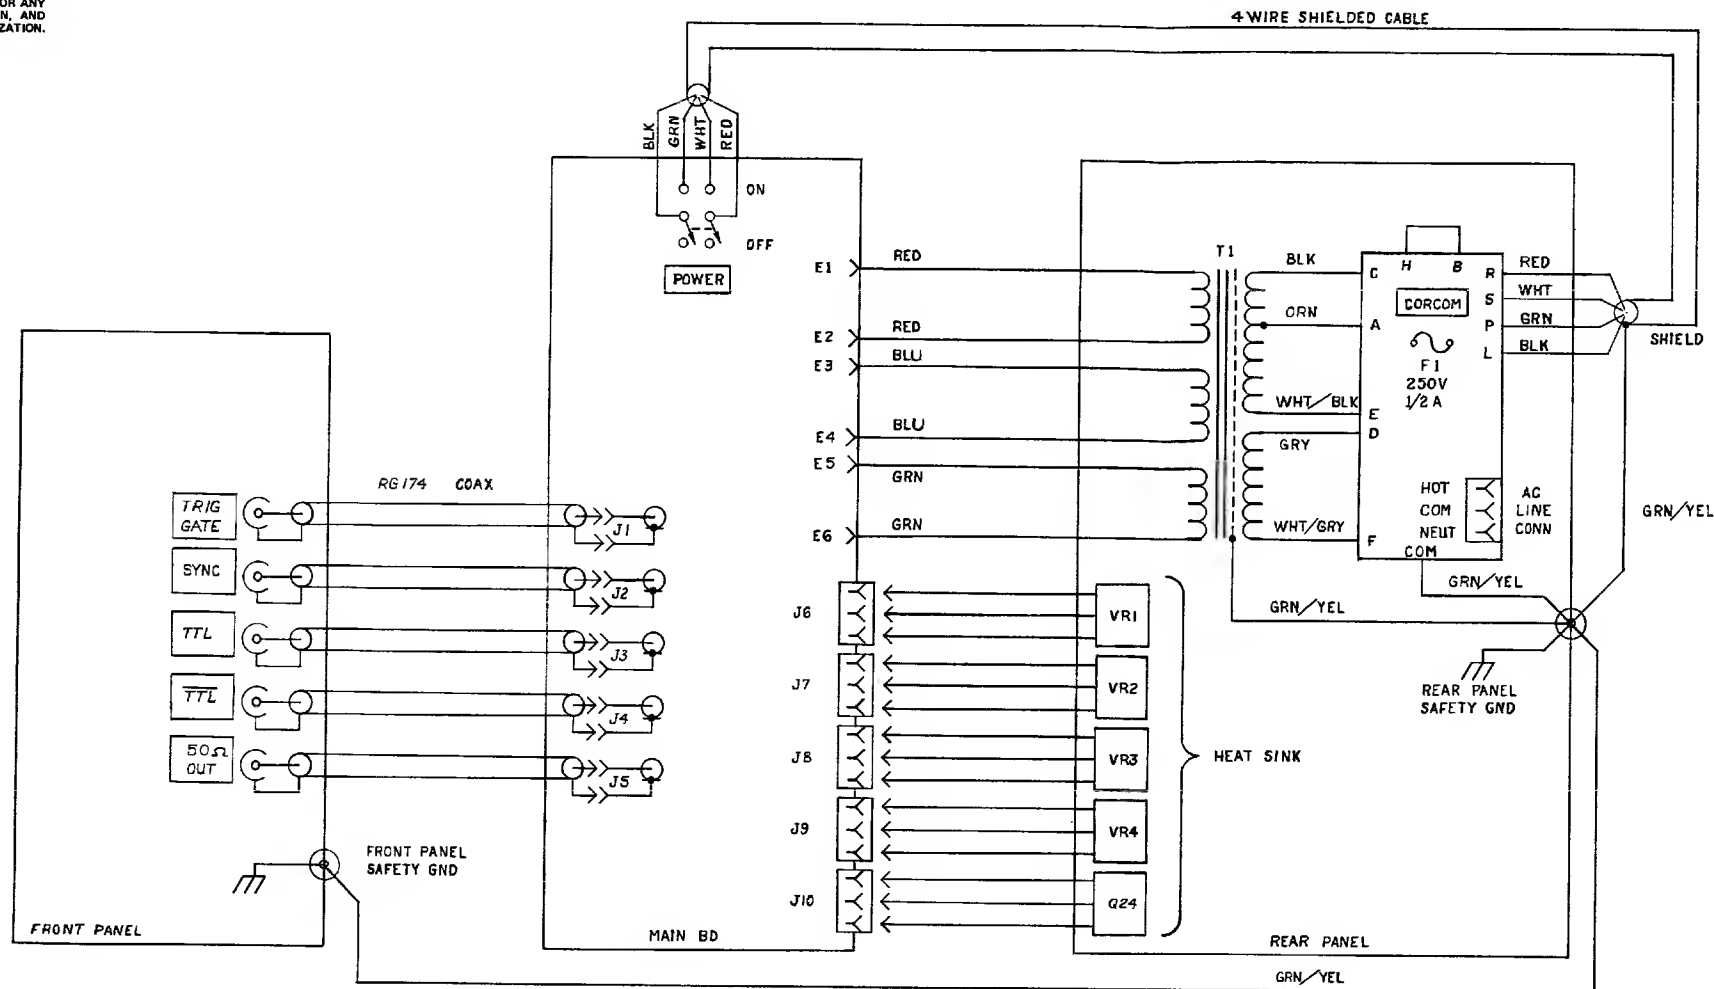

NOTE: UNLESS OTHERWISE SPECIFIED

REMOVE ALL BURRS AND BREAK SHARP EDGES	DRAWN	DATE	WAVETEK SAN DIEGO • CALIFORNIA	
MATERIAL	PROJ ENGR	11/11/77	TITLE	
	RON CONERO		INSTRUMENT SCHEMATIC	
	RELEASE APPROV	11/22/77		
	RON CONERO			
FINISH	TOLERANCE UNLESS OTHERWISE SPECIFIED			
WAVETEK PROCESS	.XXX ± .010 ANGLES ± 1°			
	.XX ± .030			
	DO NOT SCALE DWG			
SCALE				
	MODEL NO.	DWG NO.	REV	
	802	0004-00-0119		
	CODE IDENT	23338	SHEET / OF /	




THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

D


C

B

A

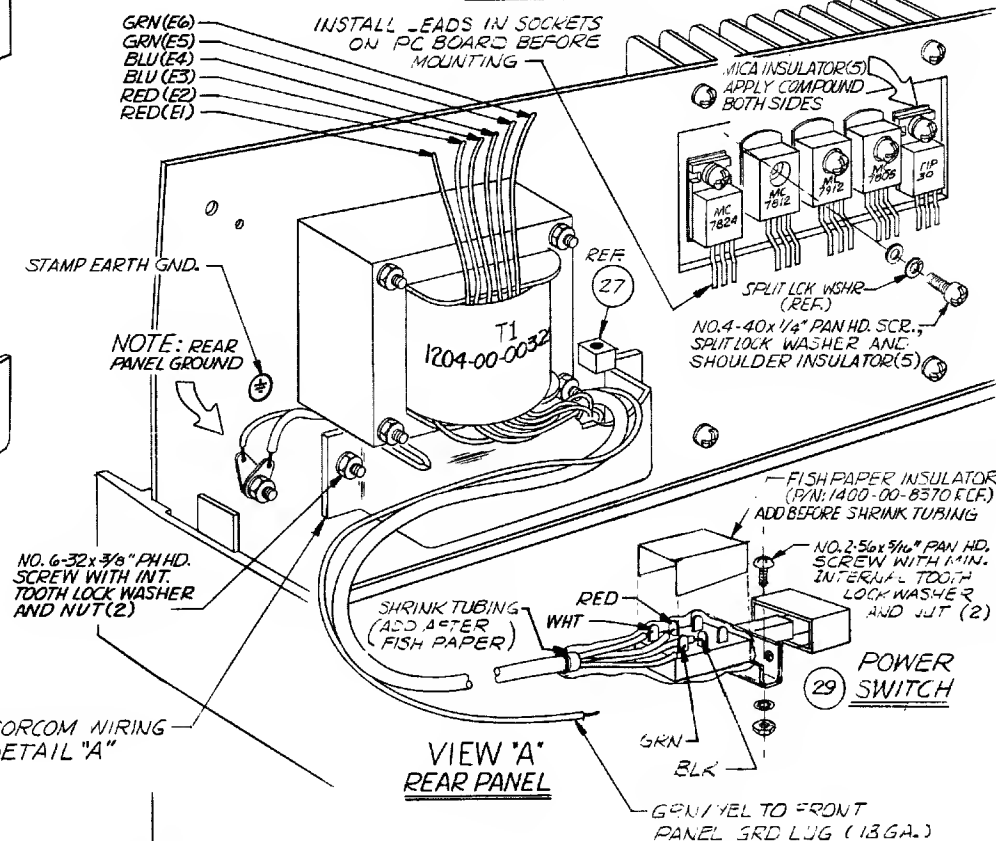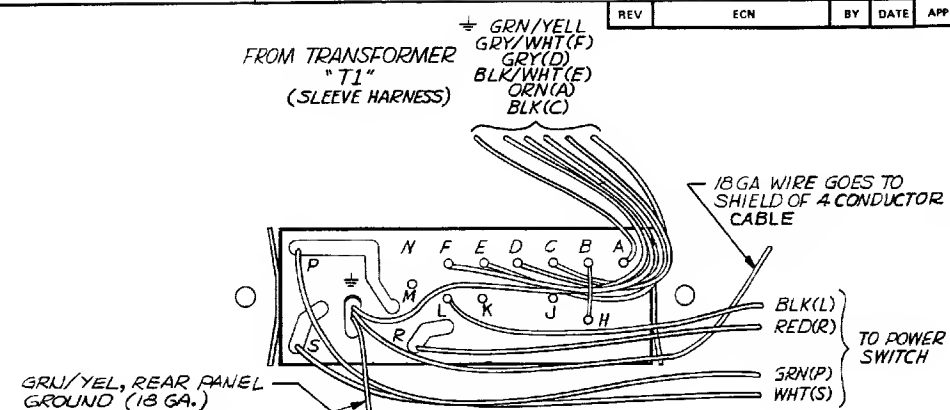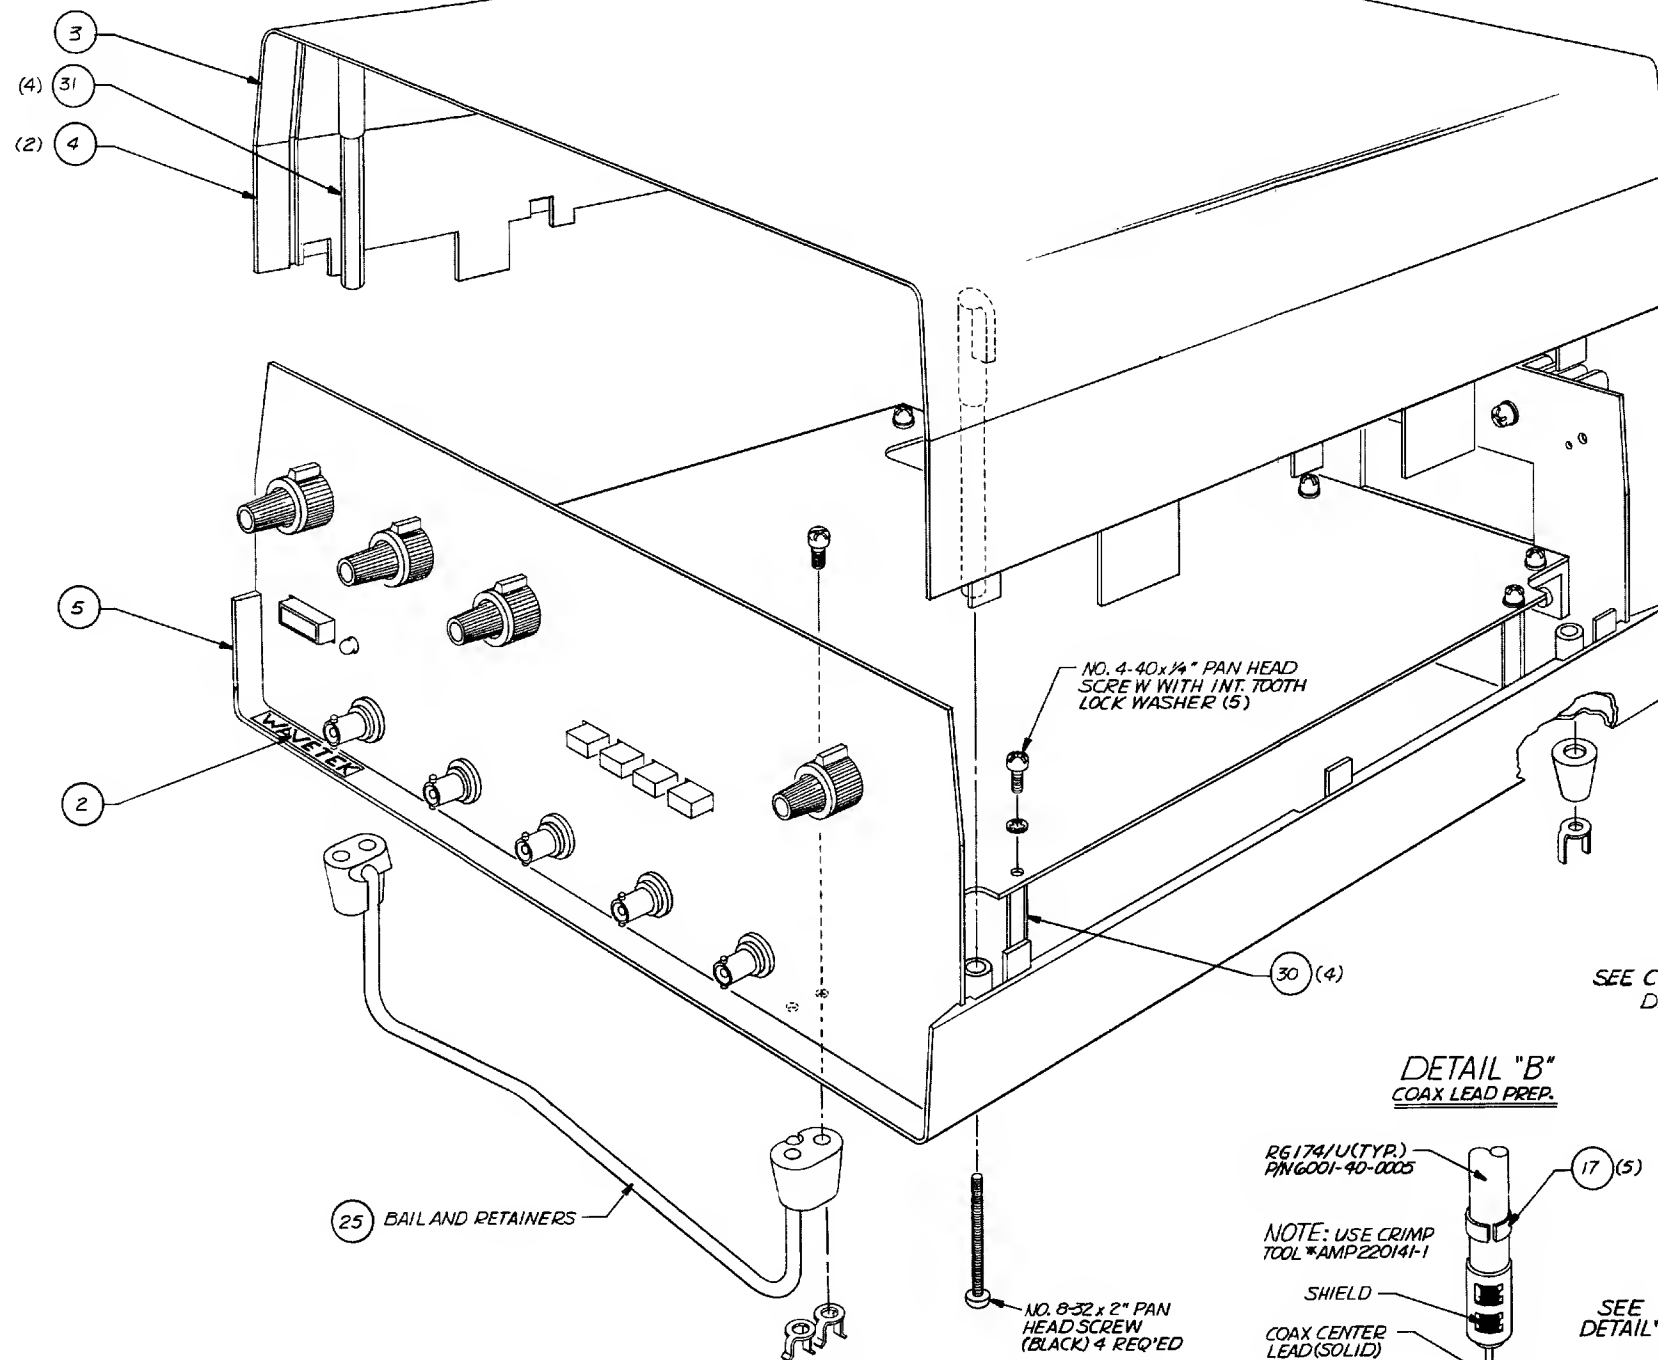

DETAIL "B"
COAX LEAD PREP.

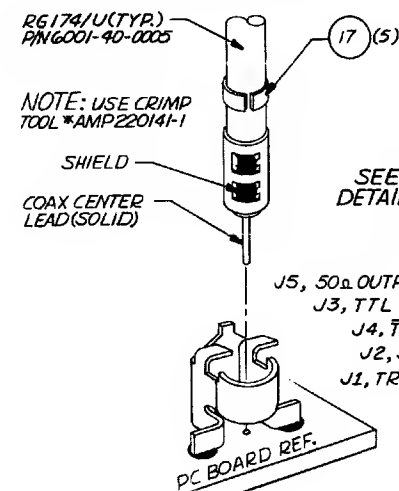

VIEW "B"
FRONT PANEL BNC

REMOVE ALL BURRS AND BREAK SHARP EDGES		DRAWN D. COOPER	DATE 9-19-7	WAVETEK SAN DIEGO • CALIFORNIA	
MATERIAL	PROJ ENGR	RON CONERO	11/1/77	TITLE	
	RELEASE APPROV	RON CONERO	11/22/77	ASSEMBLY CHASSIS	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		XX ± .010 ANGLES ± 1		
FINISH WAVETEK PROCESS	DD NOT SCALE DWG		MODEL NO	DWG NO	REV
	SCALE		802	0102-00-0631	4
			CODE IDENT	23338	SHEET 2 OF 2

NOTE UNLESS OTHERWISE SPECIFIED

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

REV ECN BY DATE APP

REFERENCE DESIGNATORS	PART DESCRIPTION	ORIG-MFGN-PART-NO	MFGN	WAVETEK NO.	QTY/PT
NONE	ASSY DRWG CHASSIS	0102-00-0631	WVTK	0102-00-0631	1
1	TRANSFORMER	802-0632	WVTK	1204-00-0632	1
2	PLATE, NAME	139-305	WVTK	1400-00-2180	1
3	COVER, TOP	180-300-1	WVTK	1400-00-5000	1
4	EXPANDER	180-301	WVTK	1400-00-5010	2
5	COVER, BOTTOM	180-300-2	WVTK	1400-00-5030	1
6	SHIELD, PWR	1400-00-6210	WVTK	1400-00-6210	1
7	LABEL, I.D.	1400-00-6930	WVTK	1400-00-6930	1
8	LABEL, WARNING	1400-00-6940	WVTK	1400-00-6940	1
9	COAX KNOB SET (MOD) GTY:112400-01-0004	1400-00-6979	WVTK	1400-00-6979	1
10	END BELL	1400-00-6982	WVTK	1400-00-6982	1
11	PANEL, FRONT	1400-00-7840	WVTK	1400-00-7840	1
12	PANEL, REAR	1400-00-7855	WVTK	1400-00-7853	1
13	BRKT, SUPT	1400-00-7883	WVTK	1400-00-7883	2
14	HEAT SINK REF:3200-06-0002	1400-00-7899	WVTK	1400-00-7899	1
NONE	INSULATION, PWR SWITCH REF:1600-99-0001	1400-00-8370	WVTK	1400-00-8370	1
WAVETEK PARTS LIST		TITLE CHASSIS		ASSEMBLY NO. 1101-00-0631	REV E
				PAGE: 1	

REFERENCE DESIGNATORS	PART DESCRIPTION	ORIG-MFGN-PART-NO	MFGN	WAVETEK NO.	QTY/PT
NONE	WIRE, COAX	61X019-10050	BWKT	6001-40-0005	6
NONE	CABLE, 4 COND, 20GA	8722	8ELDN	6001-70-0007	2
WAVETEK PARTS LIST		TITLE CHASSIS		ASSEMBLY NO. 1101-00-0631	REV E
				PAGE: 3	

REFERENCE DESIGNATORS	PART DESCRIPTION	ORIG-MFGN-PART-NO	MFGN	WAVETEK NO.	QTY/PT
15	RNC CUMM	KC-7946	KING	2100-01-0002	5
16	RECEPTACLE	631	CGHCH	2100-03-0026	1
17	CABLE CONTACT	2262M6-2	AMP	2100-03-0040	5
18	SOLDER LUG	1497	SMITH	2100-04-0012	6
19	SOLDER LUG	1485-6	SMITH	2100-04-0025	2
20	COAX KNOB SET	KC-67-1-SB-0-M-9	HOGAN	2400-01-0009	3
21	LABEL, RECEPT	85-1501	CGHCH	2400-04-0002	1
22	FUSE, 250V, 1/2A, SR	313-500	LITFU	2400-05-0010	1
23	BUSHING NYLON	4L2FF	THOMN	2400-01-0002	3
24	HEARING, PANEL	119	SMITH	2800-01-0004	1
31	STANDOFF	1475-M03-F05-632	UNICP	2800-02-0010	4
30	STANDOFF	1479-M03-F05-440	UNICP	2800-02-0023	4
25	RAIL ASSY W/PT	180-500	WVTK	2800-08-0010	1
26	INSERT # 6	74-11-106-13	SOTCO	2800-09-0017	4
27	FAST, CHASSIS	1591-C11	USECO	2800-09-0022	1
28	WASHER, SHOULDER	266R	SMITH	2800-27-0004	10
29	SWITCH ASSY PB	5102-00-0008	WVTK	5102-00-0008	1
WAVETEK PARTS LIST		TITLE CHASSIS		ASSEMBLY NO. 1101-00-0631	REV E
				PAGE: 2	

REMOVE ALL BURRS AND BREAK SHARP EDGES	DRAWN	DATE	WAVETEK SAN DIEGO • CALIFORNIA	
MATERIAL	PROJ ENGR		TITLE CHASSIS	
	RELEASE APPROV			
	TOLERANCE UNLESS OTHERWISE SPECIFIED XXX ± .010 ANGLES: 1° XX ± .030			
FINISH WAVETEK PROCESS	DO NOT SCALE OWG	MODEL NO. 802	DWG NO. 1101-00-0631	REV E
	SCALE	CODE IDENT	23338	SHEET 1 OF 1

NOTE: UNLESS OTHERWISE SPECIFIED


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

REV	ECN	BY	DATE	APP
A	ECN 1713	RO	12-77	

LAST REF. DES. USED


R175
CR74
IC7
Q36
VR4
S7
C74
L10
J10

R26 & R86 NOT USED

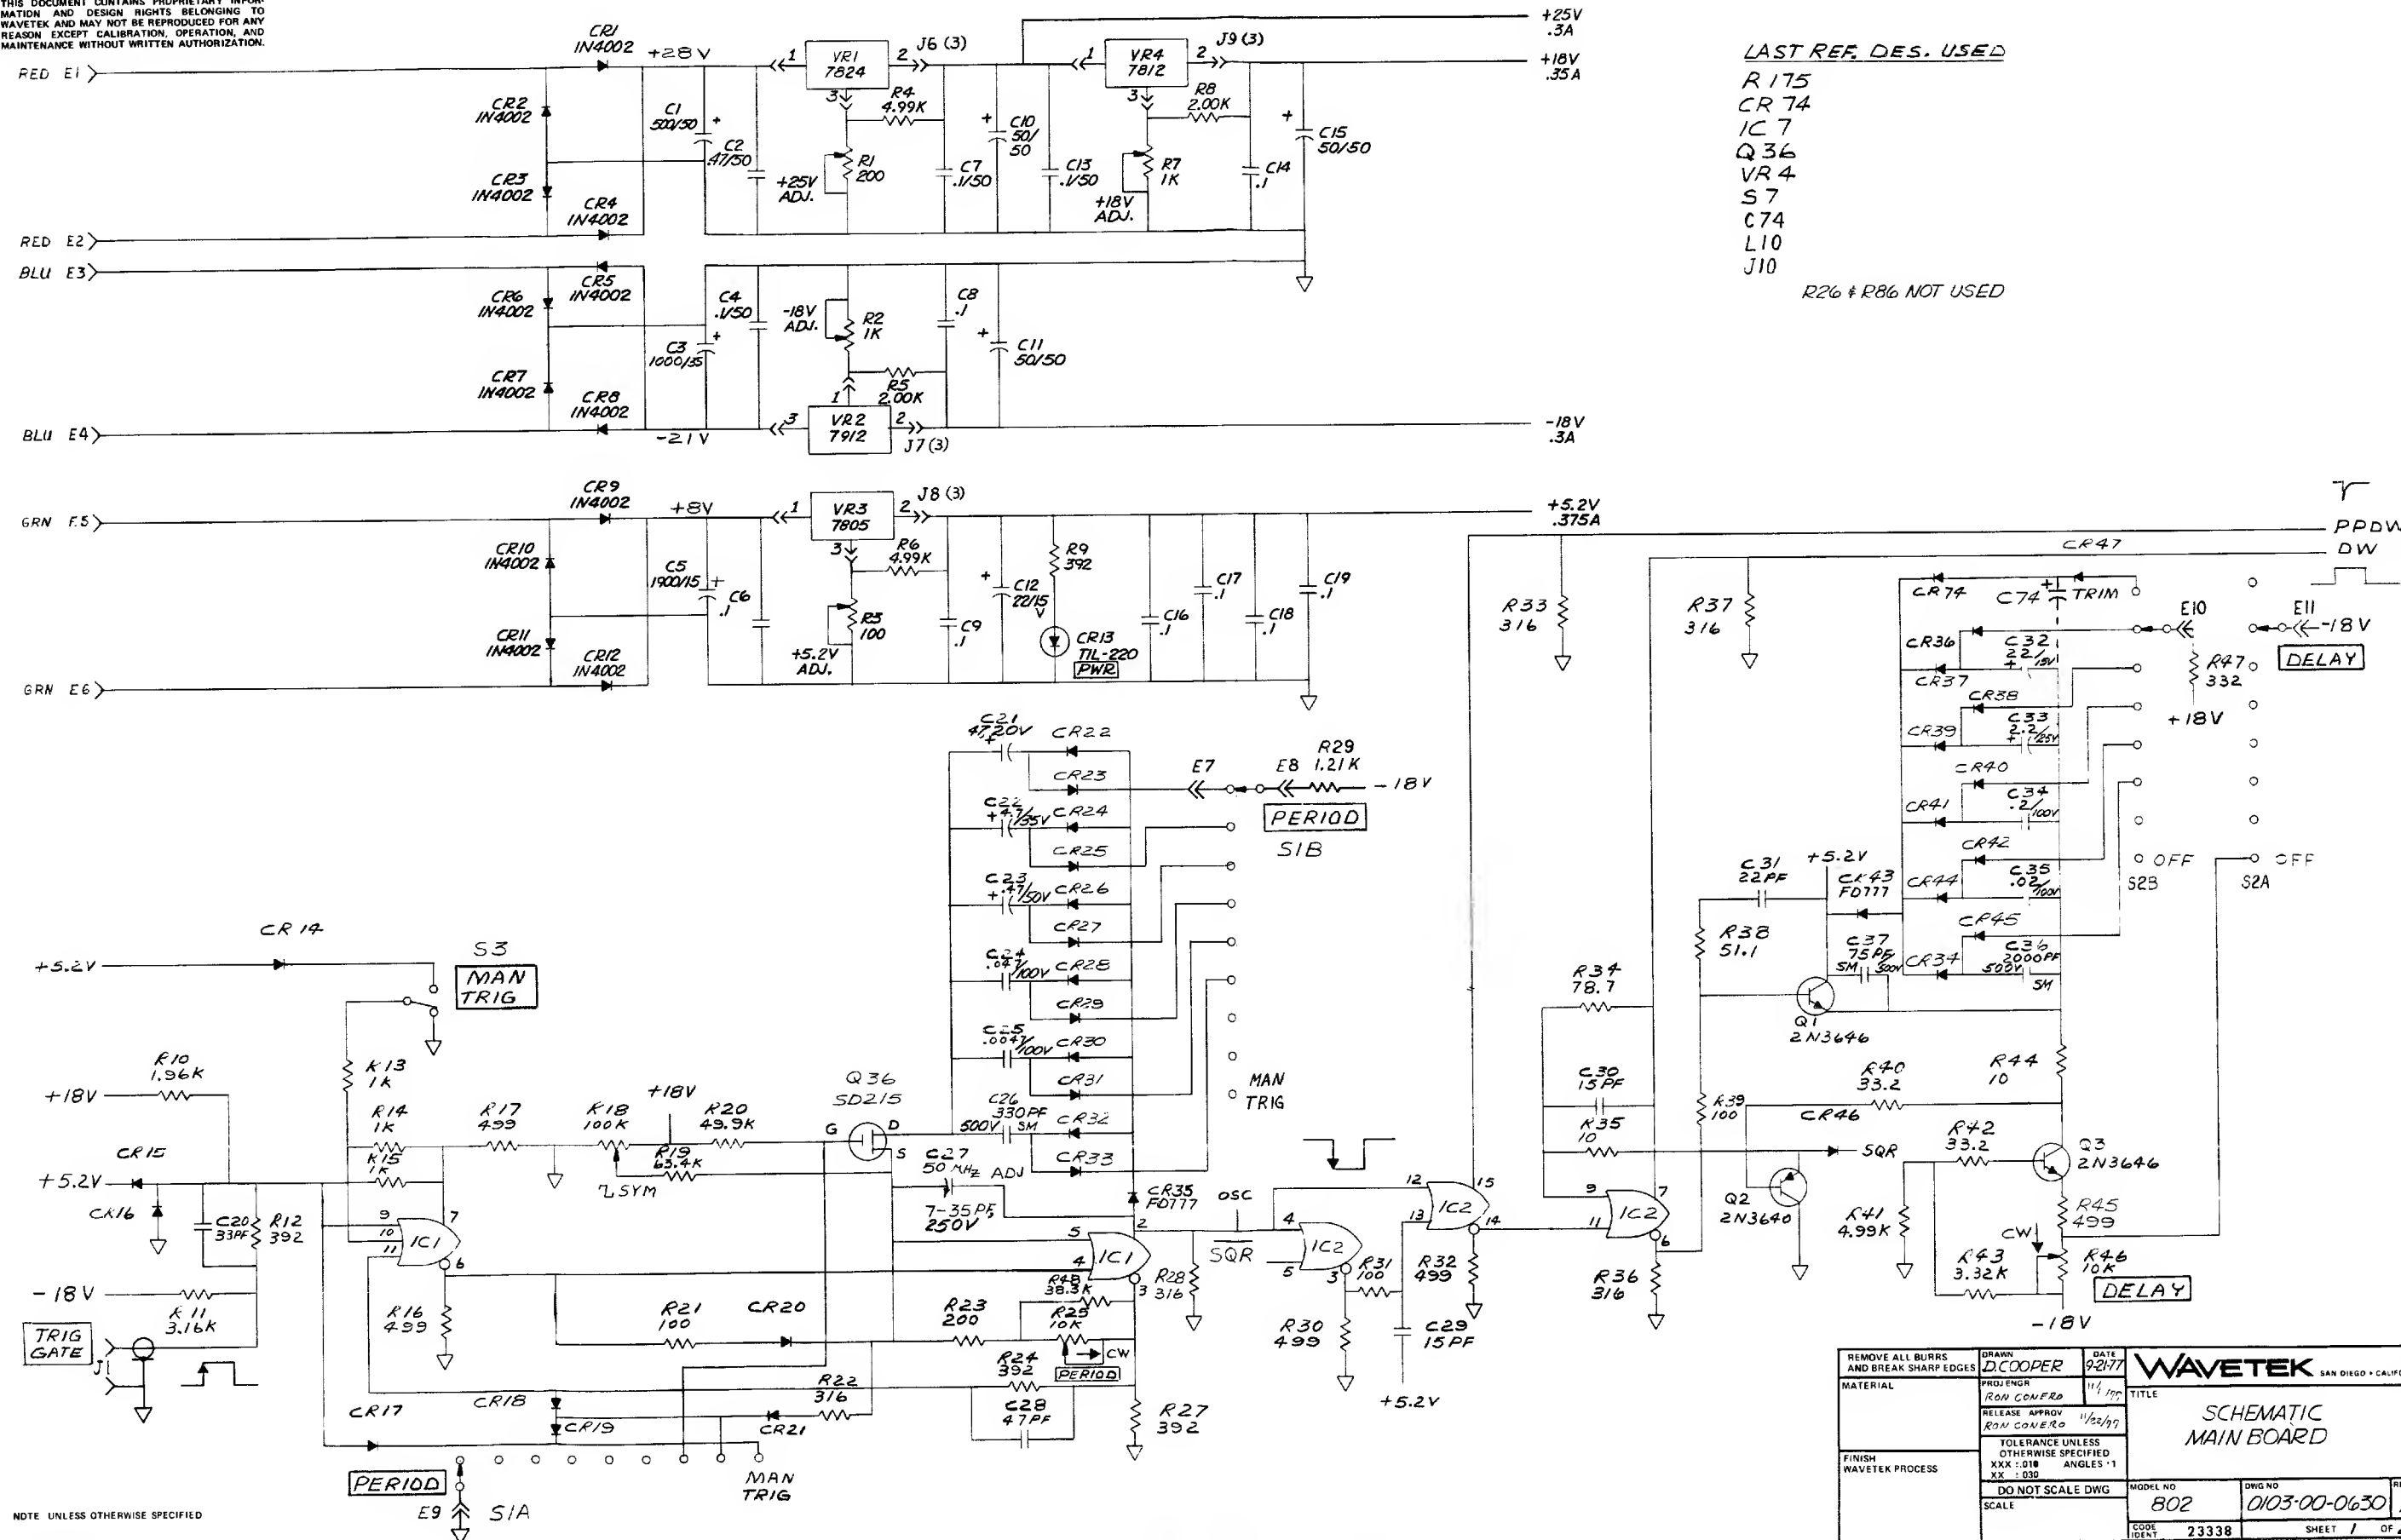

REMOVE ALL BURRS AND BREAK SHARP EDGES	DRAWN D. COOPER	DATE 9-21-77	WAVETEK SAN DIEGO • CALIFORNIA	
MATERIAL	PROJ ENGR RON CONERO	11/1/77	TITLE SCHEMATIC MAIN BOARD	
FINISH WAVETEK PROCESS	RELEASE APPROV RON CONERO	11/22/77	TOLERANCE UNLESS OTHERWISE SPECIFIED XXX: 0.1% ANGLES: 1 XX: 0.3%	
SCALE	DO NOT SCALE DWG	MODEL NO 802	DWG NO 0103-00-0630	REV A
		CODE IDENT 23338	SHEET 1	OF 2


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

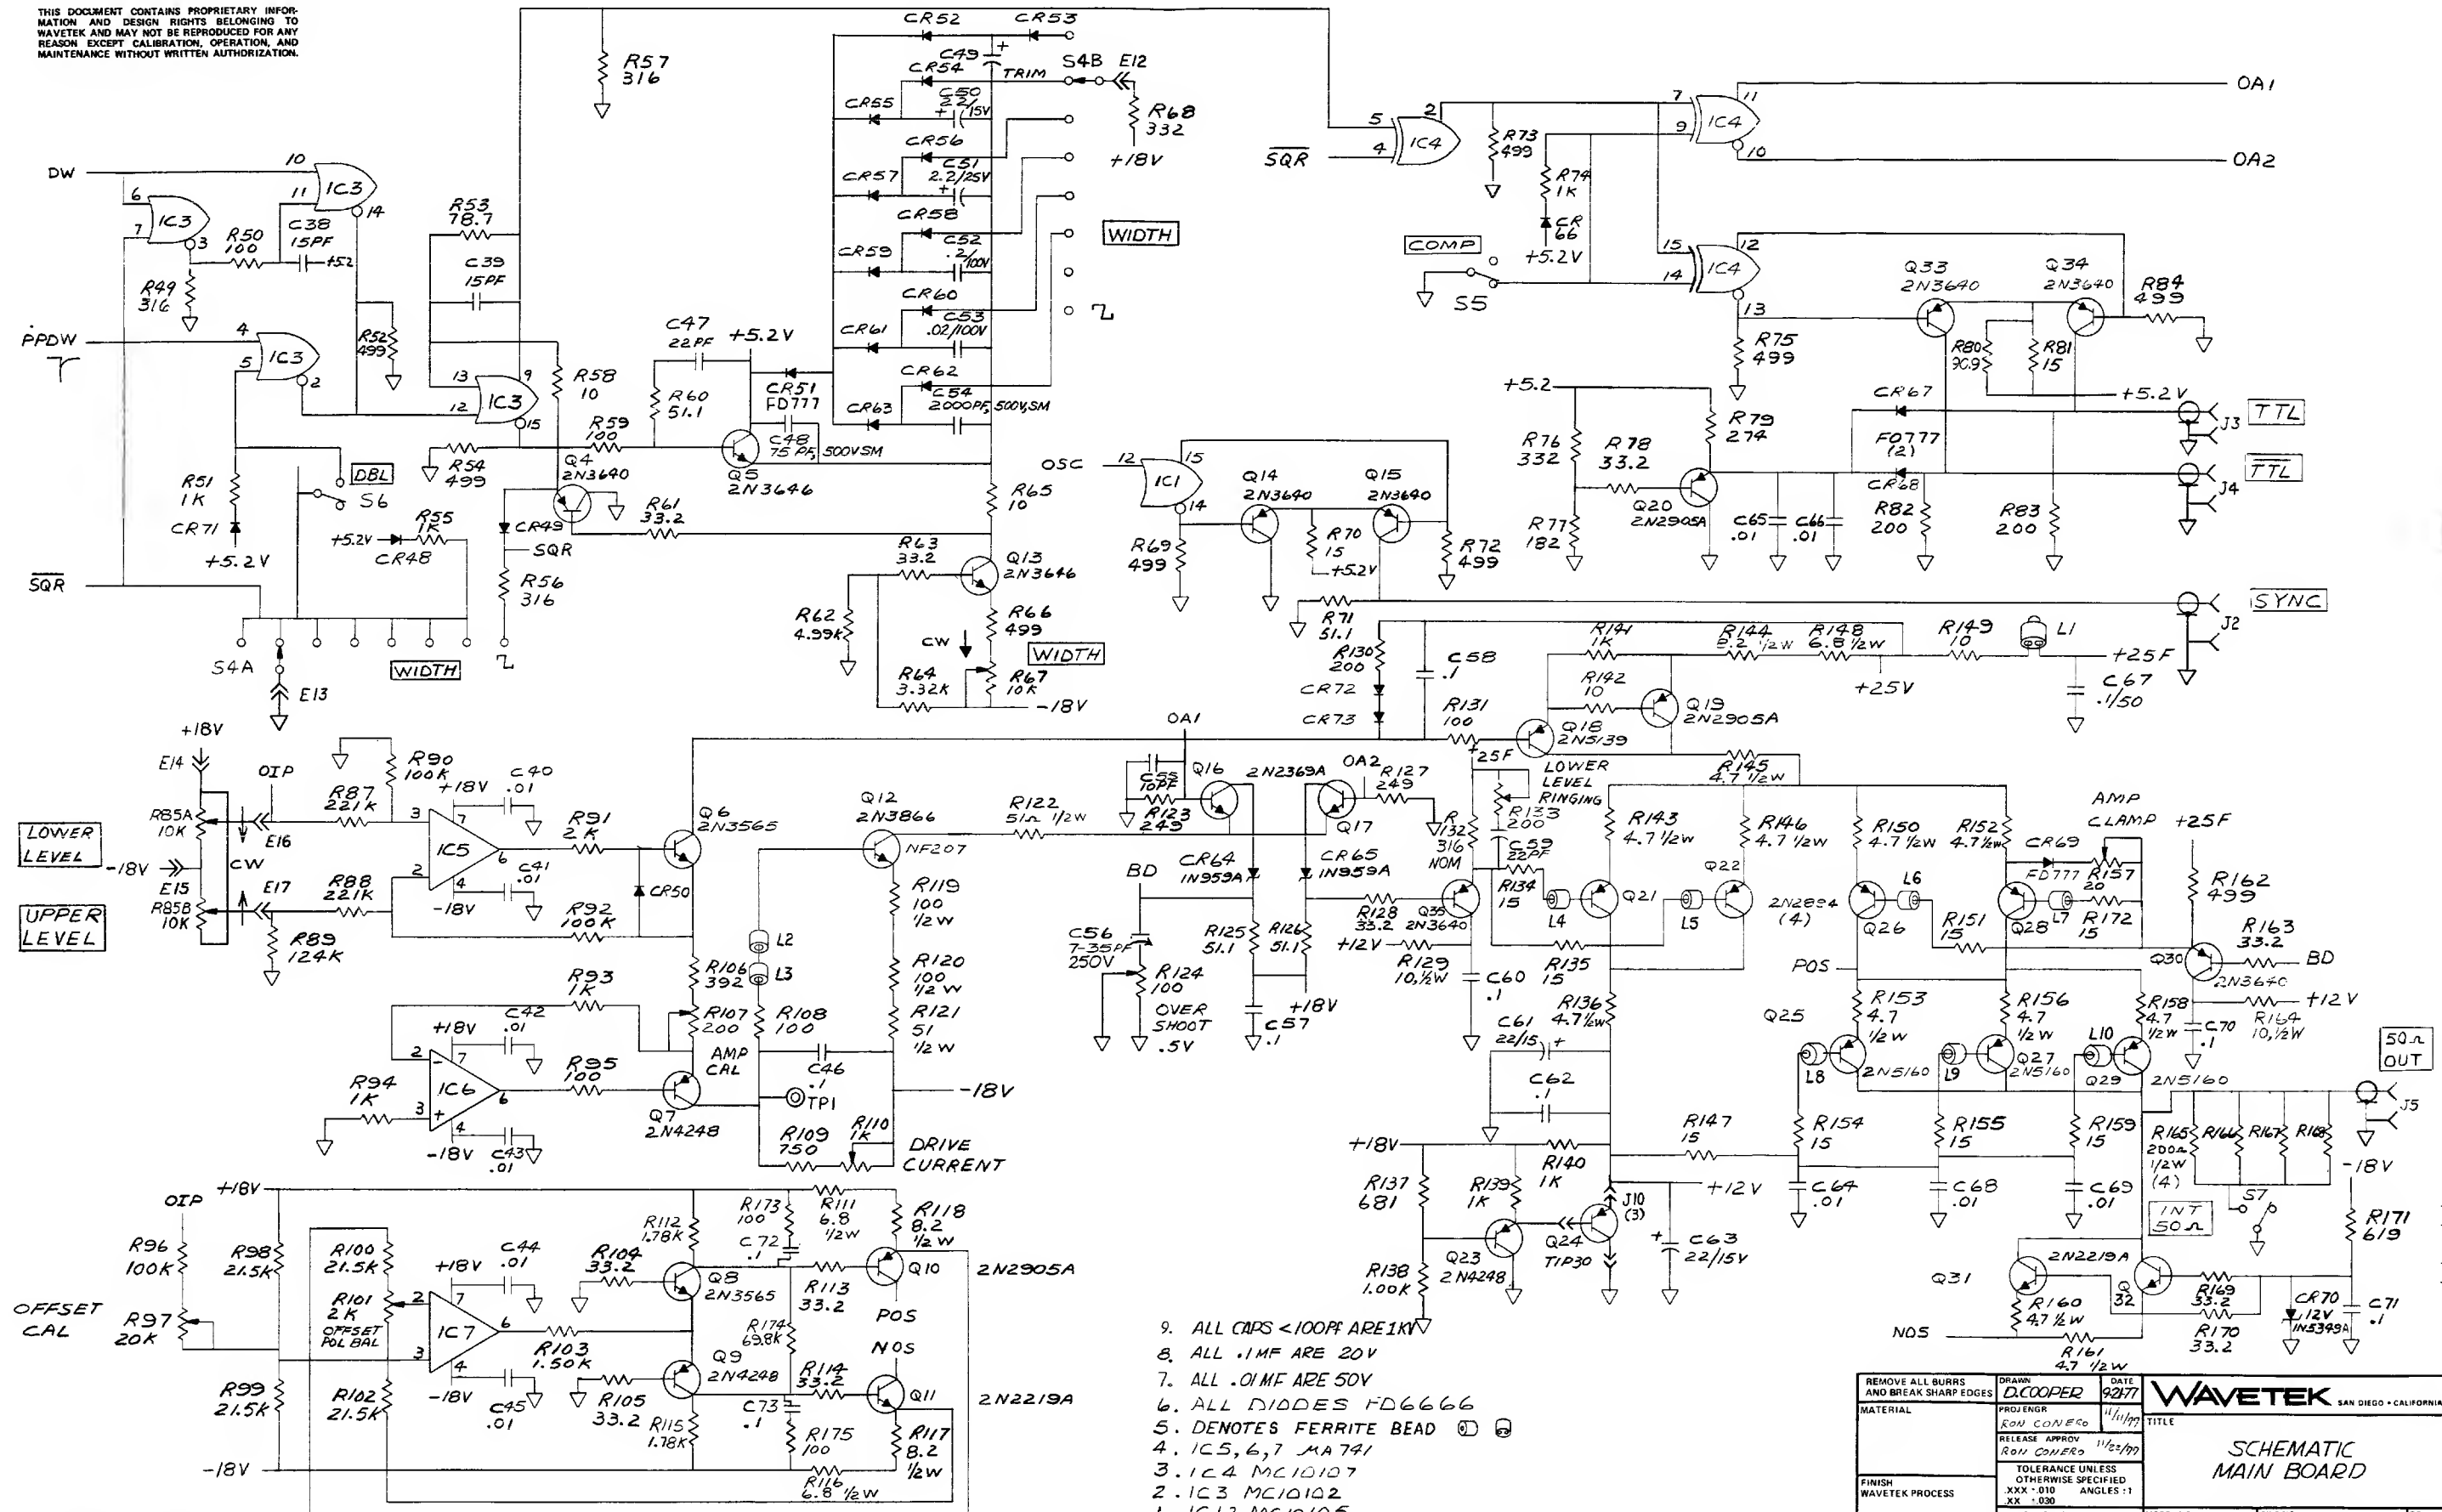

9. ALL CAPS <100PF ARE 1KV
8. ALL .1MF ARE 20V
7. ALL .01MF ARE 50V
6. ALL DIODES FD6666
5. DENOTES FERRITE BEAD (D) (B)
4. IC5, 6, 7 MA 741
3. IC4 MC10107
2. IC3 MC10102
1. IC1, 2 MC10105




NOTE: UNLESS OTHERWISE SPECIFIED

REMOVE ALL BURRS AND BREAK SHARP EDGES		DRAWN: D. COOPER		DATE: 9/27/77	
MATERIAL		PROJ ENGR: RON CONERO		TITLE: SCHEMATIC MAIN BOARD	
FINISH: WAVETEK PROCESS		RELEASE APPROV: RON CONERO		TOLERANCE UNLESS OTHERWISE SPECIFIED: .1	
SCALE		DO NOT SCALE DWG		MODEL NO: 802	
CODE IDENT: 23338		DWG NO: 0103-00-0630		REV: 4	
SHEET 2		OF 2			



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.



REV	ECN	BY	DATE	APP

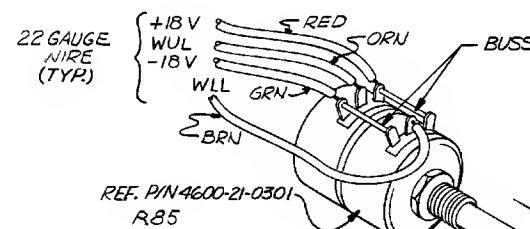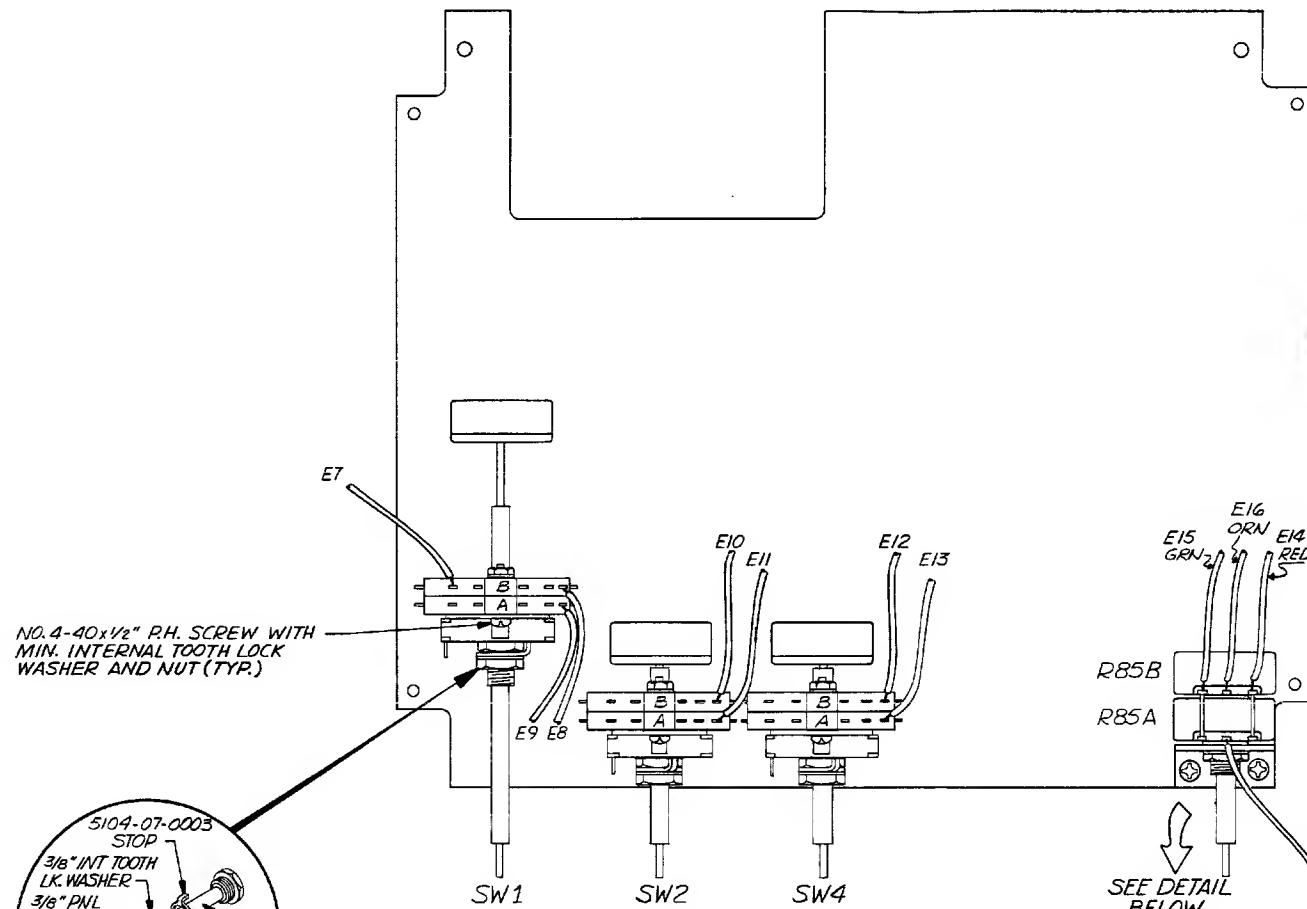

MOUNTING BRACKET (REF. P/N 1400-00-6923) INSTALL AFTER WAVE SOLDER

NO. 2-56x5/16" P.H. SCREW WITH MIN. INT. TOOTH LOCK WASHER AND NUT (2)

3/8" PNL NUT AND INT. TOOTH LOCK WASHER

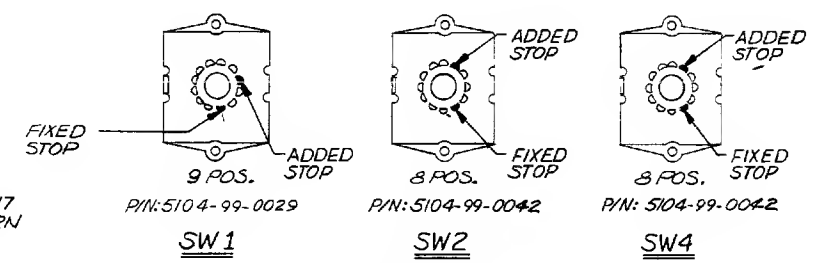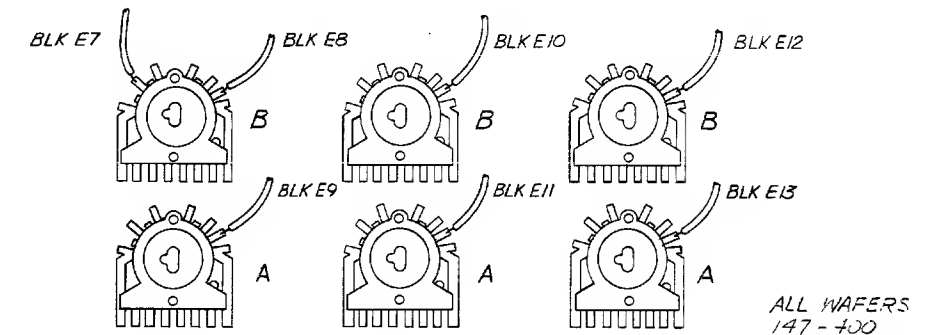

DETENTS SHOWN FROM FRONT VIEW IN FULL COUNTER CLOCKWISE POSITION

NOTE: UNLESS OTHERWISE SPECIFIED

REMOVE ALL BURRS AND BREAK SHARP EDGES		DRAWN <i>D. COOPER</i>	DATE <i>9-2-77</i>	WAVETEK SAN DIEGO • CALIFORNIA	
MATERIAL	PROJ ENGR <i>RON CONERO</i>	<i>11/1/77</i>	TITLE <i>ASSEMBLY MAIN BOARD</i>		
	RELEASE APPROV <i>RON CONERO</i>	<i>11/2-1/77</i>			
	TOLERANCE UNLESS OTHERWISE SPECIFIED XXX ± .010 ANGLES ± .1 XX ± .030				
	DO NOT SCALE DWG				
FINISH WAVETEK PROCESS	SCALE		MODEL NO <i>802</i>	DWG NO <i>0101-00-0630</i>	REV <i>B</i>
			CODE IDENT <i>23338</i>	SHEET <i>2</i> OF <i>2</i>	

8

7

6

5

4

3

2

1

REV

ECN

BY

DATE

APP

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

REFERENCE DESIGNATORS

PART DESCRIPTION

ORIG-MFG-PART-NO

MFGP

WAVETEK NO.

QTY/PT

NONE

ASSY ORWG MAINBOARD

0101-00-0630

WVTK

0101-00-0630

1

NONE

SCHEMATIC MAINBOARD

0103-00-0630

WVTK

0103-00-0630

1

NONE

BACKET

1400-00-6923

WVTK

1400-00-6923

1

C55

CAP,CER,10PF,1KV

DD-100

CRL

1500-01-0011

1

C40 C41 C42 C43 C44
C45 C64 C65 C66 C68
C69

CAP,CER,.01MF,50V

CK-103

CRL

1500-01-0310

11

C13 C4 C67 C7

CAP,CER,.1MF,50V

CK-104

CRL

1500-01-0410

4

C14 C16 C17 C18 C19
C46 C57 C58 C6 C60
C62 C70 C71 C72 C73
C8 C9

CAP,CER,.1MF,20V

UK20-104

ARCO

1500-01-0413

17

C29 C30 C38 C39

CAP,CER,15PF,1KV

DD-150

CRL

1500-01-0511

4

C31 C47 C59

CAP,CER,22PF,1KV

DD-220

CRL

1500-02-2011

3

C20

CAP,CER,33PF,1KV

DD-330

CRL

1500-03-3011

1

C28

CAP,CER,47PF,1KV

DD-470

CRL

1500-04-7011

1

C36 C54

CAP,MICA,2000PF,500V

DM19-202J

ARCO

1500-12-0200

2

C26

CAP,MICA,330PF,500V

DM15-331J

ARCO

1500-13-3100

1

C37 C48

CAP,MICA,75PF,500V

DM15-750J

ARCO

1500-17-5000

2

C3

CAP,ELECT,1000MF,35V

3901086035GL6

SPRAG

1500-31-0212

1

WAVETEK
PARTS LIST

TITLE
PCA MAINBOARD

ASSEMBLY NO.
1100-00-0630
PAGE: 1

REV
E

REFERENCE DESIGNATORS

PART DESCRIPTION

ORIG-MFG-PART-NO

MFGP

WAVETEK NO.

QTY/PT

NONE

TEMP

2010R1

USECD

2100-05-0011

1

NONE

HEAT SINK

NF-207

WAKE

2800-11-0001

4

NONE

TRANSIPAD

10123A

METHS

2800-11-0003

1

NONE

TRANSIPAD

10160

METHS

2800-11-0004

4

NONE

HEATSINK

NF-209

WAKE

2800-11-0006

5

NONE

HEATSINK

203 CB

WAKE

2800-11-0009

4

NONE

FERRITE BEAD

56-590-65/38

FEWXX

3100-00-0001

9

NONE

BALUN CORE

2873000902

FARIT

3100-00-0002

1

R124 R3

POT,TRIM,100

91AR100

BECK

4600-01-0103

2

R110 R2 R7

POT,TRIM,1K

91AP100

BECK

4600-01-0209

3

R18

POT,TRIM,100K

91AR100K

BECK

4600-01-0402

1

R157

POT,TRIM,20

91AW20

BECK

4600-02-0000

1

R1 R107 P133

POT,TRIM,200

91AW200

BECK

4600-02-0101

3

R101

POT,TRIM,2K

91AR2K

BECK

4600-02-0201

1

R97

POT,TRIM,20K

91AR20K

BECK

4600-02-0301

1

R85

POT,DUAL,10K

4P-1997

CTS

4600-21-0301

1

R25

POT,CONT,10K

4609-71-0309

WVTK

4609-71-0309

1

WAVETEK
PARTS LIST

TITLE
PCA MAINBOARD

ASSEMBLY NO.
1100-00-0630
PAGE: 3

REV
E

REFERENCE DESIGNATORS

PART DESCRIPTION

ORIG-MFG-PART-NO

MFGP

WAVETEK NO.

QTY/PT

R103

PES,MF,1/8W,1%,1.5K

RN550-1501F

TRW

4701-03-1501

1

R134 P135 P147 R151
R154 R155 P159 R172
R70 R81

RES,MF,1/8W,1%,15

RN550-1500F

TRW

4701-03-1509

10

P112 R115

PES,MF,1/8W,1%,1.75K

RN550-1781F

TRW

4701-03-1781

2

R77

RES,MF,1/8W,1%,1.62

RN550-1620F

TRW

4701-03-1820

1

R10

PES,MF,1/8W,1%,1.96K

RN550-1961F

TRW

4701-03-1961

1

R130 R23 R42 R83

RES,MF,1/8W,1%,200

RN550-2000F

TRW

4701-03-2000

4

R5 R8 R91

PES,MF,1/8W,1%,2K

RN550-2001F

TRW

4701-03-2001

3

R100 R102 R98 R99

RES,MF,1/8W,1%,21.5K

RN550-2152F

TRW

4701-03-2152

4

R87 R88

RES,MF,1/8W,1%,221K

RN550-2213F

TRW

4701-03-2213

2

R123 R127

RES,MF,1/8W,1%,24V

RN550-2490F

TRW

4701-03-2490

2

R79

RES,MF,1/8W,1%,274

RN550-2740F

TRW

4701-03-2740

1

R132T R22 R28 R33 R36
R37 R49 R56 R57

RES,MF,1/8W,1%,316

RN550-3160F

TRW

4701-03-3160

4

R11

PES,MF,1/8W,1%,3.16K

RN550-3161F

TRW

4701-03-3161

1

R47 R68 R76

RES,MF,1/8W,1%,332

RN550-3320F

TRW

4701-03-3320

3

R43 R64

RES,MF,1/8W,1%,3.32K

RN550-3321F

TRW

4701-03-3321

2

R104 R105 R113 R114

RES,MF,1/8W,1%,33.2

RN550-3342F

TRW

4701-03-3329

13

WAVETEK
PARTS LIST

TITLE
PCA MAINBOARD

ASSEMBLY NO.
1100-00-0630
PAGE: 5

REV
E

REFERENCE DESIGNATORS

PART DESCRIPTION

ORIG-MFG-PART-NO

MFGP

WAVETEK NO.

QTY/PT

C5

CAP,ELECT,1900MF,15V

3901986015GL4

SPRAG

1500-31-9201

1

C10 C11 C15

CAP,ELECT,50MF,50V

5000506050D07

SPRAG

1500-35-0003

3

C1

CAP,ELECT,500MF,50V

3905076050GL4

SPRAG

1500-35-0103

1

C35 C53

CAP,MYLR,.02MF,100V

8A18203F

IMH

1500-42-0304

2

C34 C52

CAP,MYLR,.2MF,100V

8A1R204F

IMH

1500-42-0404

2

C25

CAP,MYLR,.0047MF,100V

WMF-1D47

EDF

1500-44-7214

1

C24

CAP,MYLR,.047MF,100V

WMF-1S47

EDF

1500-44-7304

1

C27 C56

VARI,7-35PF,250V

78-TR1K0-02 7/35 MF

TR1K0

1500-53-5000

2

C33 C51

CAP,TANT,2.2MF,25V

1960225X9025HA1

SPRAG

1500-72-2502

2

C12 C32 C50 C61 C63

CAP,TANT,22MF,15V

1960226X9015KA1

SPRAG

1500-72-2601

5

C2 C23

CAP,TANT,.47MF,50V

1500474X9050B2

SPRAG

1500-74-7403

2

C22

CAP,TANT,4.7MF,35V

1500475X9035B2

SPRAG

1500-74-7502

1

C21

CAP,TANT,47MF,20V

1960476X9020PE4

SPRAG

1500-74-7601

1

NONE

MAINBOARD

1700-00-0630

WVTK

1700-00-0630

1

NONE

SPPING SOCKET

3-130-208-9

AMP

2100-03-0037

5

NONE

COAX SOCKET

2262A7-2

AMP

2100-03-0038

5

NONE

SOCKET

10-18-2031

MOLEX

2100-03-0047

5

WAVETEK
PARTS LIST

TITLE
PCA MAINBOARD

ASSEMBLY NO.
1100-00-0630
PAGE: 2

REV
E

REFERENCE DESIGNATORS

PART DESCRIPTION

ORIG-MFG-PART-NO

MFGP

WAVETEK NO.

QTY/PT

R46 R67

FROM:4600-01-0312
POT,CONT,10K
FROM:4600-01-0312

4609-71-0310

WVTK

4609-71-0310

2

R129 R164

RES,C,1/2W,5%,10

RC20GF-100

STKPL

4700-25-0100

2

R136 R143 R145 R146
R150 R152 R153 R156
R159 R160 R161

RES,C,1/2W,5%,4.7

RC20GF-4R7

STKPL

4700-25-0479

11

R121 R122

RES,C,1/2W,5%,51

RC20GF510J

STKPL

4700-25-0510

2

R111 R116 R148

RES,C,1/2W,5%,6.8

RC20GF-6R8

STKPL

4700-25-0680

3

R117 R118 R144

RES,C,1/2W,5%,8.2

RC20GF-8R2

STKPL

4700-25-0829

3

R119 R120

RES,C,1/2W,5%,100

RC20GF101J

STKPL

4700-25-1000

2

R108 R131 R173 R175
R21 R31 R39 R50 R59
R95

RES,MF,1/8W,1%,100

RN550-1000F

TRW

4701-03-1000

10

R13 R138 R139 R14
R140 P141 R15 R51 R55
R74 R93 R94

RES,MF,1/8W,1%,1K

RN550-1001F

TRW

4701-03-1001

12

R90 R92 R96

RES,MF,1/8W,1%,100K

RN550-1003F

TRW

4701-03-1003

3

R142 R149 R35 R44 R58
R65

RES,MF,1/8W,1%,10

RN550-10R0F

TRW

4701-03-1009

6

R29

RES,MF,1/8W,1%,1.21K

RN550-1211F

TRW

4701-03-1211

1

R89

RES,MF,1/8W,1%,124K

RN550-1243F

TRW

4701-03-1243

1

WAVETEK
PARTS LIST

TITLE
PCA MAINBOARD

ASSEMBLY NO.
1100-00-0630
PAGE: 4

REV
E

REFERENCE DESIGNATORS

PART DESCRIPTION

ORIG-MFG-PART-NO

MFGP

WAVETEK NO.

QTY/PT

R129 R163 R169 R170
R40 R42 R61 P63 R78

RES,MF,1/8W,1%,3A,3K

RN550-3832F

TRW

4701-03-3832

1

R48

RES,MF,1/8W,1%,392

RN550-3920F

TRW

4701-03-3920

5

R106 R12 R24 R27 R9

RES,MF,1/8,1%,499

RN550-4990F

TRW

4701-03-4990

14

R16 R162 P17 R30 R32
R45 R52 R54 P66 R69
R72 R73 R75 R84

RES,MF,1/8W,1%,4.99K

RN550-4991F

TRW

4701-03-4991

4

R4 R41 R6 R62

RES,MF,1/8W,1%,4.99K

RN550-4992F

TRW

4701-03-4992

1

R20

RES,MF,1/8W,1%,51.1

RN550-51R1F

TRW

4701-03-5119

5

P171

RES,MF,1/8W,1%,619

RN550-6190F

TRW

4701-03-6190

1

R19

RES,MF,1/8W,1%,63.4K

RN550-6342F

TRW

4701-03-6342

1

R137

RES,MF,1/8W,1%,681

RN550-6810F

TRW

4701-03-6810

1

R174

RES,MF,1/8W,1%,69.8K

RN550-6982F

TRW

4701-03-6982

1

R109

RES,MF,1/8W,1%,750

RN550-7500F

TRW

4701-03-7500

1

R34 R53

RES,MF,1/8W,1%,78.7

RN550-7877F

TRW

4701-03-7879

2

P80

RES,MF,1/8W,1%,90.9

RN550-90R9F

TRW

4701-03-9099

1

R165 R166 P167 R168

RES,MF,1/2W,1%,200

RN6502000F

TRW

4701-23-2000

4

CP64 CR65

U100E

1N959

WOT

4801-01-0959

2

WAVETEK
PARTS LIST

TITLE
PCA MAINBOARD

ASSEMBLY NO.
1100-00-0630
PAGE: 6

REV
E

REMOVE ALL BURRS
AND BREAK SHARP EDGES

DRAWN

DATE

WAVETEK
SAN DIEGO • CALIFORNIA

MATERIAL

PROJ ENGR

TITLE
MAIN

FINISH
WAVETEK PROCESS

RELEASE APPROV

TOLERANCE UNLESS
OTHERWISE SPECIFIED
XXX : 010 ANGLES : 1°
XX : 030

DO NOT SCALE DWG

MODEL NO
802

DWG NO
1100-00-0630

REV
E

SCALE

CODE
IDENT

23338

SHEET
1

OF
2

NOTE: UNLESS OTHERWISE SPECIFIED

8

7

6

5

4

3

2

1

8

7

6

5

4

3

2

1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND DESIGN RIGHTS BELONGING TO WAVETEK AND MAY NOT BE REPRODUCED FOR ANY REASON, EXCEPT CALIBRATION, OPERATION, AND MAINTENANCE WITHOUT WRITTEN AUTHORIZATION.

REV ECN BY DATE APP

REFERENCE DESIGNATORS	PART DESCRIPTION	ORIG=MFG#-PART-NO	MFG#	WAVETEK NO.	QTY/PT
CR70	DIODE	1N5349A	MOT	4801-01-5349	1
CR1 CR10 CR11 CR12 CR2 CR3 CR4 CR5 CR6 CR7 CR8 CR9	DIODE	SCE-1	SEMTC	4801-02-0001	12
CR35 CR43 CR51 CR67 CR68 CR69	DIODE	FD-777	FAIR	4807-02-0777	6
CR14 CR15 CR16 CR17 CR18 CR19 CR20 CR21 CR22 CR23 CR24 CR25 CR26 CR27 CR28 CR29 CR30 CR31 CR32 CR33 CR34 CR36 CR37 CR38 CR39 CR40 CR41 CR42 CR44 CR45 CR46 CR47 CR48 CR49 CR50 CR52 CR53 CR54 CR55 CR56 CR57 CR58 CR59 CR60 CR61 CR62 CR63 CR66 CR71 CR72 CR73 CR74	DIODE	FD-6666	FAIR	4807-02-6666	52
CR13	LED	TIL-220	TI	4899-00-0006	1
Q11 Q31 Q32	TRANS	2N2219A	FAIR	4901-02-2191	3
Q16 Q17	TRANS	2N2369A	FAIR	4901-02-3691	2
Q21 Q22 Q26 Q28	TRANS	2N2894A	NSC	4901-02-8941	4
Q10 Q19 Q20	TRANS	2N2905A	FAIR	4901-02-9051	3
Q6 Q8	TRANS	2N3565	FAIR	4901-03-5650	2
WAVETEK PARTS LIST	TITLE PCA MAINBOARD		ASSEMBLY NO. 1100-00-0630 PAGE: 7		REV E

REFERENCE DESIGNATORS	PART DESCRIPTION	ORIG=MFG#-PART-NO	MFG#	WAVETEK NO.	QTY/PT
VR1	IC	7824	FAIR	7000-78-2400	1
VR2	IC	7912	MOT	7000-79-1200	1
VR3	VOLTAGE REGULATOR	7805393	FAIR	8000-78-0500	1
IC3	IC	MC10102	MOT	8001-01-0200	1
IC1 IC2	IC	MC10105	MOT	8001-01-0500	2
IC4	IC	MC10107	MOT	8001-01-0700	1
WAVETEK PARTS LIST	TITLE PCA MAINBOARD		ASSEMBLY NO. 1100-00-0630 PAGE: 9		REV E

REFERENCE DESIGNATORS	PART DESCRIPTION	ORIG=MFG#-PART-NO	MFG#	WAVETEK NO.	QTY/PT
Q14 Q15 Q2 Q30 Q33 Q34 Q35 Q4	TRANS	2N3640	FAIR	4901-03-6400	8
Q1 Q13 Q3 Q5	TRANS	2N3646	FAIR	4901-03-6460	4
Q12	TRANS	2N3866	MOT	4901-03-8660	1
Q23 Q7 Q9	TRANS	2N4246	FAIR	4901-04-2460	3
Q18	TRANS	2N5139	FAIR	4901-05-1390	1
Q25 Q27 Q29	TRANS	2N5140	MOT	4901-05-1600	3
Q24	TRANS	TTP-30	TI	4902-00-0300	1
Q36	TRANS	80215DE	SIG	4902-00-2140	1
NONE	SWITCH ASSY	5103-00-0025	WVTK	5103-00-0025	1
NONE	BUTTON	J-52305-BLACK	CHL	5103-04-0003	4
NONE	WAFER	147-400	WVTK	5104-02-0015	6
NONE	SWITCH STOP	215-33-001-01-22	CTS	5104-07-0003	3
SW1	DETENT MOD FROM:5104-01-0010	5104-99-0029	WVTK	5104-99-0029	1
SW2 SW4	DETENT MOD FROM:5104-01-0003	5104-99-0042	WVTK	5104-99-0042	2
IC5 IC6 IC7	IC	MA-741	FAIR	7000-07-4100	3
VR4	IC	MC7812CP	MOT	7000-78-1200	1
WAVETEK PARTS LIST	TITLE PCA MAINBOARD		ASSEMBLY NO. 1100-00-0630 PAGE: 8		REV E

REMOVE ALL BURRS AND BREAK SHARP EDGES	DRAWN	DATE	WAVETEK SAN DIEGO - CALIFORNIA	
MATERIAL	PROJ ENGR		TITLE MAIN	
	RELEASE APPROV			
	TOLERANCE UNLESS OTHERWISE SPECIFIED XXX : 010 ANGLES : 1 XX : 030			
FINISH WAVETEK PROCESS	DO NOT SCALE DWG	MODEL NO 802	DWG NO 1100-00-0630	REV E
	SCALE	CODE IDENT 23338	SHEET 2 OF 2	

NOTE: UNLESS OTHERWISE SPECIFIED